



SGM2019

Low Power, Low Dropout, RF - Linear Regulators

GENERAL DESCRIPTION

The SGM2019 series low-power, low-noise, low-dropout, CMOS linear voltage regulators operate from a 2.5V to 5.5V input voltage. They are the perfect choice for low voltage, low power applications. A low ground current makes this part attractive for battery operated power systems. The SGM2019 series also offer ultra low dropout voltage to prolong battery life in portable electronics. Systems requiring a quiet voltage source, such as RF applications, will benefit from the SGM2019 series' ultra low output noise ($30\mu\text{V}_{\text{RMS}}$) and high PSRR. An external noise bypass capacitor connected to the device's BP pin can further reduce the noise level.

The output voltage is preset to voltages in the range of 1.2V to 5.0V. Other features include a 10nA logic-controlled shutdown mode, foldback current limit and thermal shut-down protection.

The SGM2019 has Green SC70-5 and SOT23-5 packages. It operates over an ambient temperature range of -40°C to $+85^{\circ}\text{C}$.


APPLICATIONS

Cellular Telephones
Cordless Telephones
PHS Telephones
PCMCIA Cards
Modems
MP3 Player
Hand-Held Instruments
Palmtop Computers
Electronic Planners
Portable/Battery-Powered Equipment


FEATURES

- Low Output Noise
- Low Dropout Voltage
- Thermal-Overload Protection
- Output Current Limit
- High PSRR (68dB at 1kHz)
- 10nA Logic-Controlled Shutdown
- Available in Multiple Output Voltage Versions
- Fixed Outputs of 1.2V, 1.3V, 1.5V, 1.8V, 2.1V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 2.9V, 3.0V, 3.1V, 3.2V, 3.3V, 3.6V, 4.2V, 5.0V
- Adjustable Output from 1.2V to 5.0V
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature Range
- Green SC70-5 and SOT23-5 Packages

PRODUCT NAME STRUCTURE

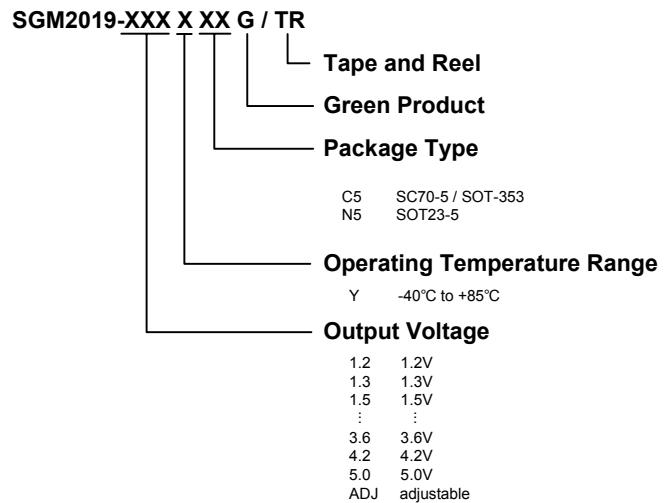

PIN CONFIGURATIONS (TOP VIEW)

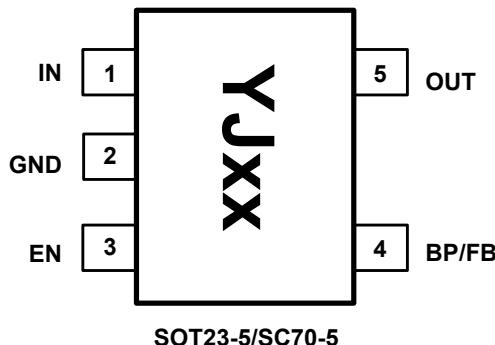

Note1: The location of pin 1 on the YJxx is determined by orienting the package marking as shown.

Note2: "xx" is the output voltage code. (For Example: when the output voltage is 1.2V, it is expressed as 12.)

Note3: When the output voltage is 2.85V, it is expressed as YJ2J.

CAUTION



This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PIN DESCRIPTION

PIN	NAME	FUNCTION
SC70-5 / SOT23-5		
1	IN	Regulator Input. Supply voltage can range from 2.5V to 5.5V. Bypass with a 1µF capacitor to GND.
2	GND	Ground.
3	EN	Shutdown Input. A logic low reduces the supply current to 10nA. Connect to IN for normal operation.
4	BP	Reference-Noise Bypass (fixed voltage version only). Bypass with a low-leakage 0.01µF ceramic capacitor for reduced noise at the output.
4	FB	Adjustable voltage version only—this is used to set the output voltage of the device.
5	OUT	Regulator Output.

TYPICAL APPLICATION CIRCUIT

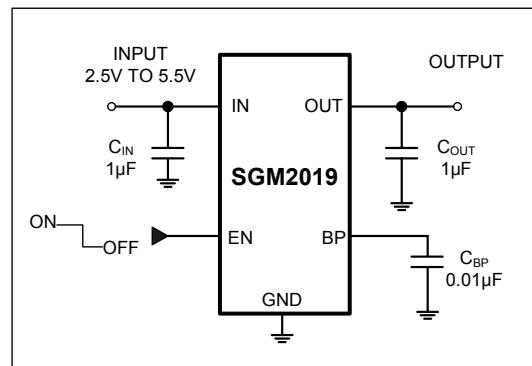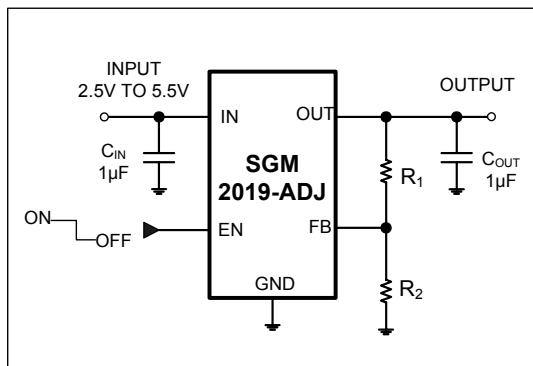

Standard 1% Resistor Values for Common Output Voltages of Adjustable Voltage Version

V _{OUT} (V)	R ₁ (kΩ)	R ₂ (kΩ)
1.2	0	63.4
1.5	10.5	42.2
1.8	34	63.4
2.8	84.5	63.4
3.0	63.4	42.2
3.3	73.2	42.2
3.6	84.5	42.2
4.2	105	42.2

Note1: $V_{OUT} = (R_1 + R_2) / R_2 \times 1.207$

Low Power, Low Dropout, RF - Linear Regulators

SGM2019

ELECTRICAL CHARACTERISTICS

($V_{IN} = V_{OUT\ (NOMINAL)} + 0.5V^{(1)}$, Full = -40°C to $+85^{\circ}\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Voltage	V_{IN}		+25°C	2.5		5.5	V
Output Voltage Accuracy ⁽¹⁾		$I_{OUT} = 0.1\text{mA}$	+25°C	-2		+2	%
Maximum Output Current		SOT23-5	+25°C	300			mA
		$V_{OUT} < 1\text{V}$, SC70-5 ⁽¹⁾		120			
		$V_{OUT} = 1.2\text{V}, 1.3\text{V}, 1.5\text{V}, 1.8\text{V}$, SC70-5 ⁽¹⁾		150			
		$V_{OUT} > 2\text{V}$, SC70-5 ⁽¹⁾		250			
Current Limit	I_{LIM}		+25°C	310	500		mA
Ground Pin Current	I_Q	No load, EN = 2V	+25°C		120	220	μA
Dropout Voltage ⁽²⁾		$I_{OUT} = 1\text{mA}$	+25°C		0.9		mV
		$I_{OUT} = 300\text{mA}$			270	400	
Line Regulation ⁽¹⁾	ΔV_{LNR}	$V_{IN} = 2.5\text{V}$ or $(V_{OUT} + 0.5\text{V})$ to 5.5V , $I_{OUT} = 1\text{mA}$	+25°C		0.02	0.05	%/V
Load Regulation	ΔV_{LDR}	$I_{OUT} = 0.1\text{mA}$ to 300mA , $C_{OUT} = 1\mu\text{F}$, $V_{OUT} > 2\text{V}$	+25°C		0.002	0.005	%/mA
		$I_{OUT} = 0.1\text{mA}$ to 300mA , $C_{OUT} = 1\mu\text{F}$, $V_{OUT} \leq 2\text{V}$			0.004	0.008	
Output Voltage Noise	e_n	$f = 10\text{Hz}$ to 100kHz , $C_{BP} = 0.01\mu\text{F}$, $C_{OUT} = 10\mu\text{F}$	+25°C		30		μV _{RMS}
Power Supply Rejection Ratio	PSRR	$C_{BP} = 0.1\mu\text{F}$, $I_{LOAD} = 50\text{mA}$,	$f = 217\text{Hz}$	+25°C		74	dB
		$C_{OUT} = 1\mu\text{F}$, $V_{IN} = V_{OUT} + 1\text{V}$	$f = 1\text{kHz}$	+25°C		68	
SHUTDOWN ⁽³⁾							
EN Input Threshold	V_{IH}	$V_{IN} = 2.5\text{V}$ to 5.5V , $V_{EN} = -0.3\text{V}$ to V_{IN}	Full	1.5			V
	V_{IL}		Full			0.3	
EN Input Bias Current	$I_{B(SHDN)}$	EN = 0V and EN = 5.5V	+25°C		0.01	1	μA
			Full		0.01		
Shutdown Supply Current	$I_{Q(SHDN)}$	EN = 0.4V	+25°C		0.01	1	μA
			Full		0.01		
Shutdown Exit Delay ⁽⁴⁾		$C_{BP} = 0.01\mu\text{F}$, $C_{OUT} = 1\mu\text{F}$, No Load	+25°C		30		μs
THERMAL PROTECTION							
Thermal Shutdown Temperature	T_{SHDN}				150		°C
Thermal Shutdown Hysteresis	ΔT_{SHDN}				15		°C

Note 1: $V_{IN} = V_{OUT\ (NOMINAL)} + 0.5\text{V}$ or 2.5V , whichever is greater.

Note 2: The dropout voltage is defined as $V_{IN} - V_{OUT}$, when V_{OUT} is 100mV below the value of V_{OUT} for $V_{IN} = V_{OUT} + 0.5\text{V}$.
(Only applicable for $V_{OUT} = +2.5\text{V}$ to $+5.0\text{V}$.)

Note 3: $V_{EN} = -0.3\text{V}$ to V_{IN}

Note 4: Time needed for V_{OUT} to reach 90% of final value.







Specifications subject to changes without notice.



SG Micro Limited
www.sg-micro.com







TYPICAL OPERATING CHARACTERISTICS

$V_{IN} = V_{OUT \text{ (NOMINAL)}} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{BP} = 0.01\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

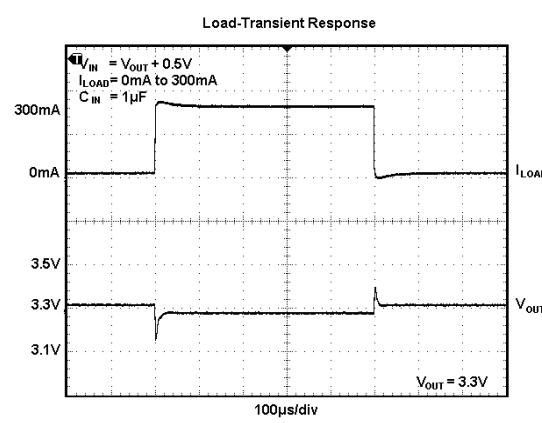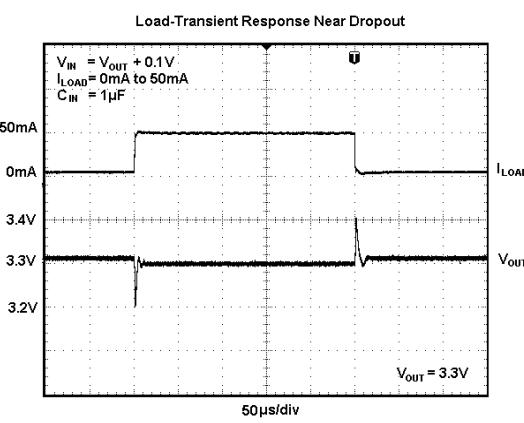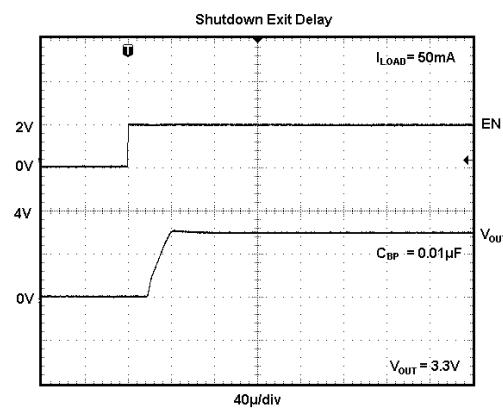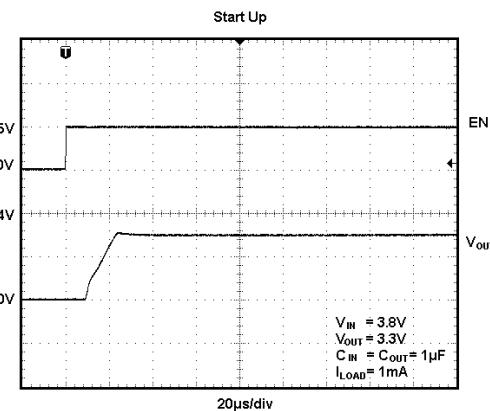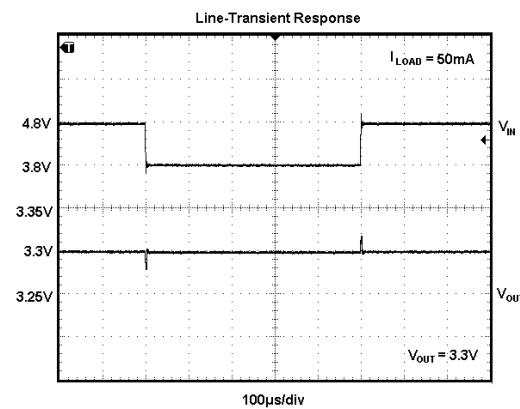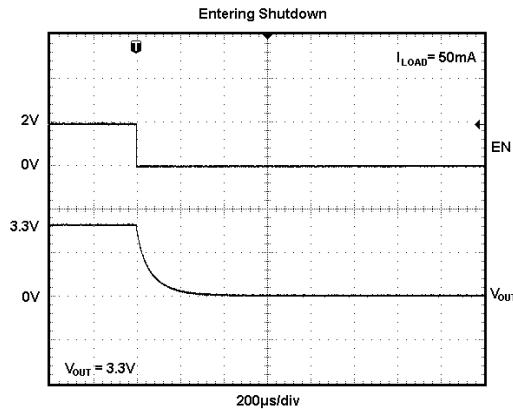







TYPICAL OPERATING CHARACTERISTICS

$V_{IN} = V_{OUT\ (NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{BP} = 0.01\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

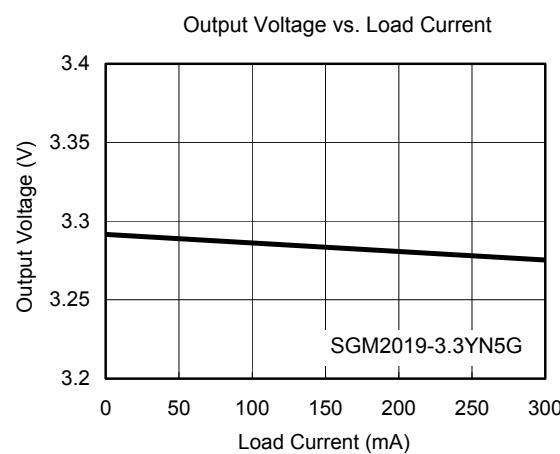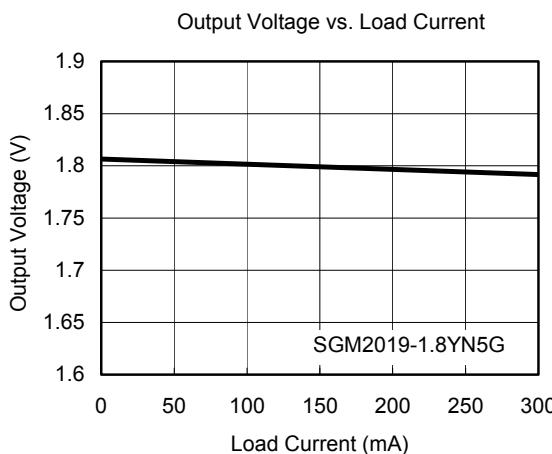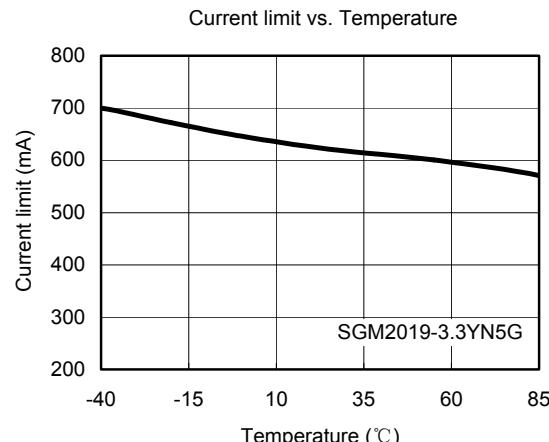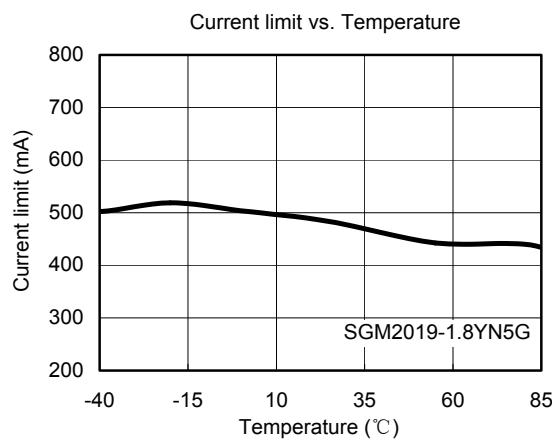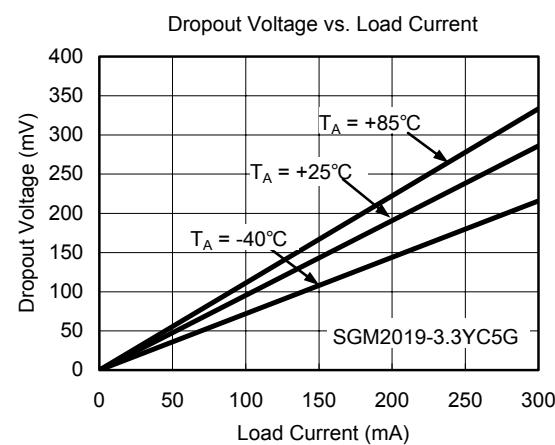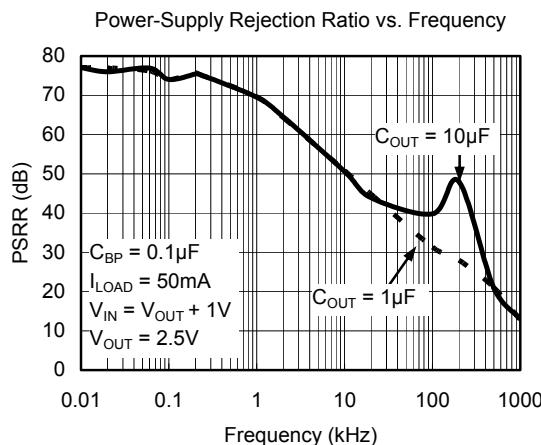






TYPICAL OPERATING CHARACTERISTICS

$V_{IN} = V_{OUT \text{ (NOMINAL)}} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{BP} = 0.01\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

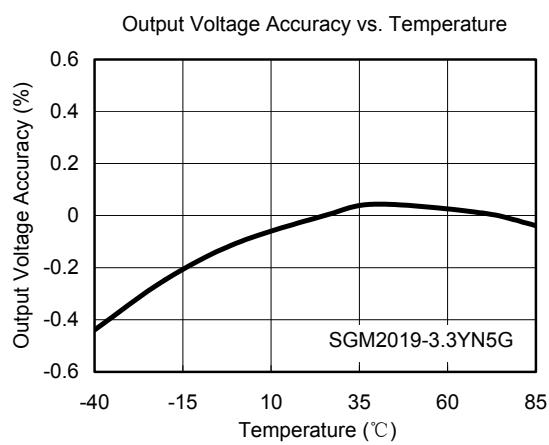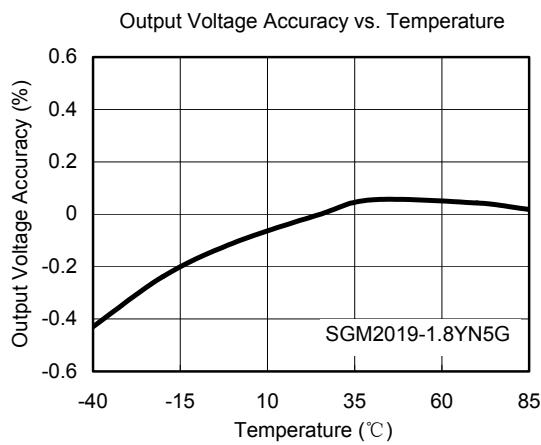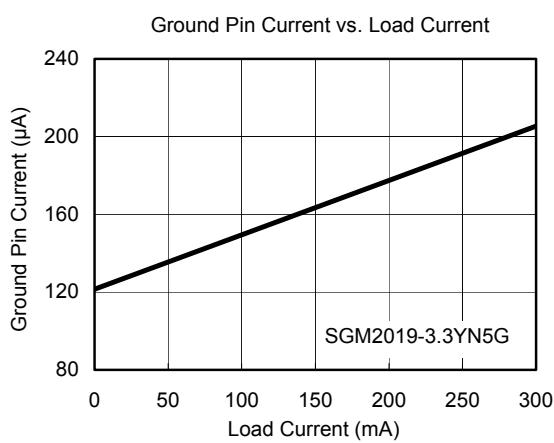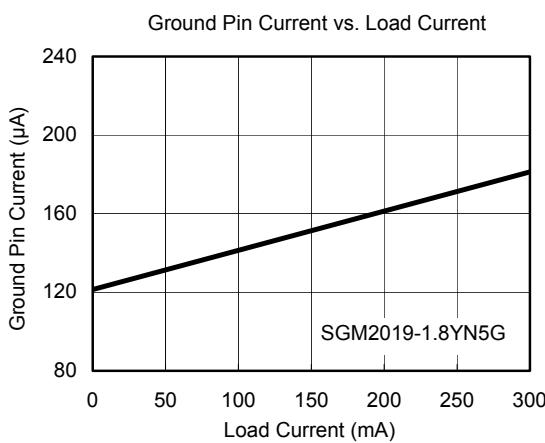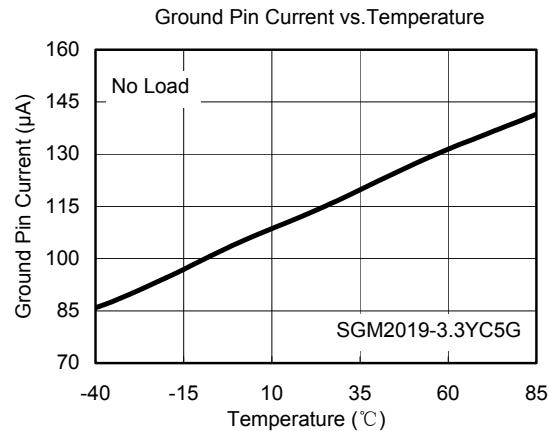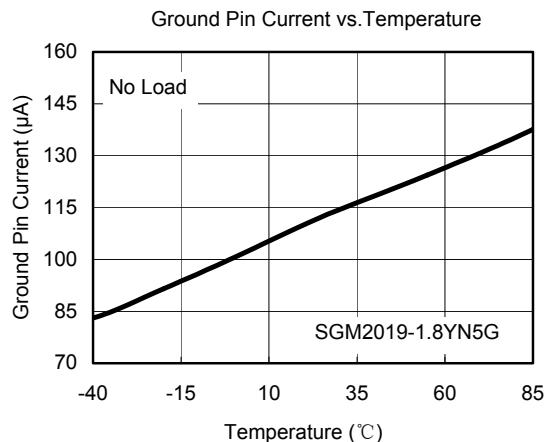


TYPICAL OPERATING CHARACTERISTICS

$V_{IN} = V_{OUT\ (NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{BP} = 0.01\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

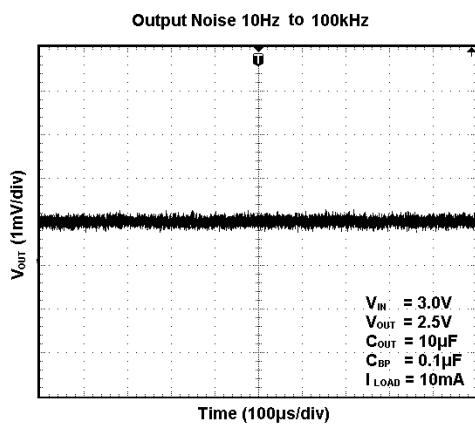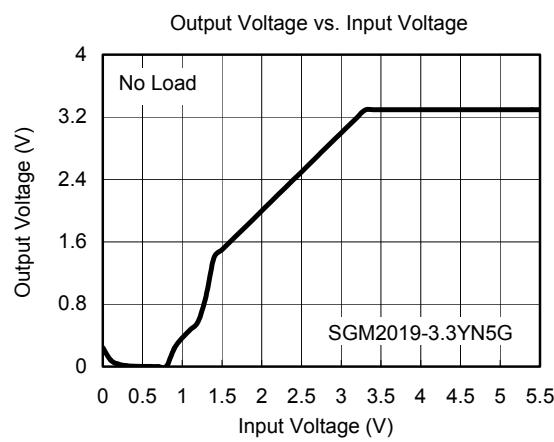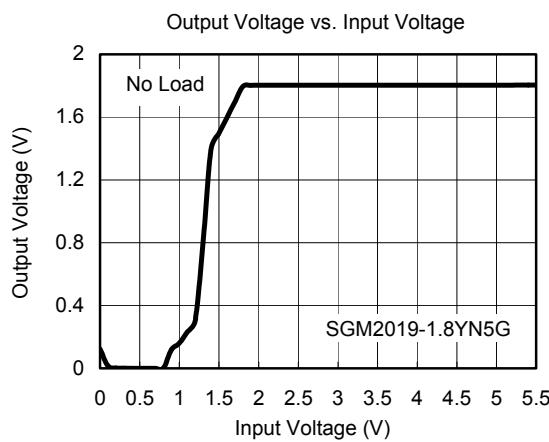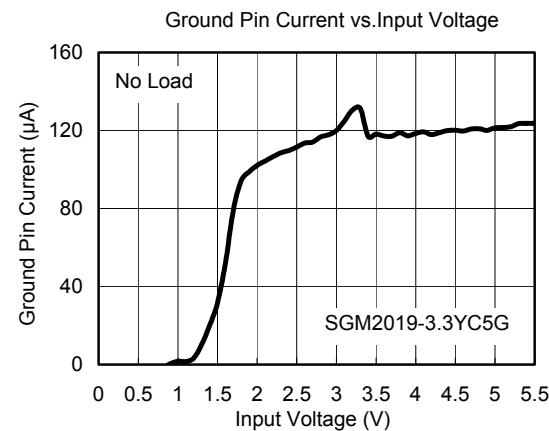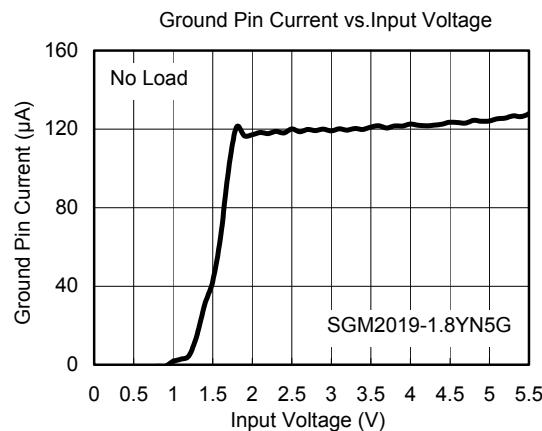

APPLICATION NOTE

When LDO is used in handheld products, attention must be paid to voltage spikes which could damage SGM2019. In such applications, voltage spikes will be generated at charger interface and V_{BUS} pin of USB interface when charger adapters and USB equipments are hot-plugged. Besides this, handheld products will be tested on the production line without battery. Test engineer will apply power from the connector pin which connects with positive pole of the battery. When external power supply is turned on suddenly, the voltage spikes will be generated at the battery connector. The voltage spikes will be very high, and it always exceeds the absolute maximum input voltage (6.0V) of LDO. In order to get robust design, design engineer needs to clear up this voltage spike. Zener diode is a cheap and effective solution to eliminate such voltage spike. For example, BZM55B5V6 is a 5.6V small package Zener diode which can be used to remove voltage spikes in cell phone designs. The schematic is shown below.

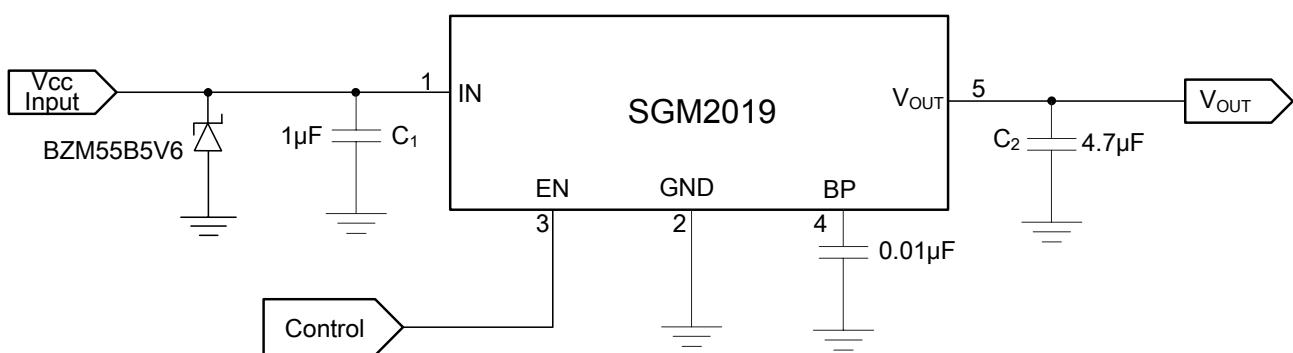

Low Power, Low Dropout, RF - Linear Regulators

SGM2019

EXPANDED ORDERING INFORMATION

MODEL	V _{OUT} (V)	PIN-PACKAGE	ORDERING NUMBER	PACKAGE MARKING	PACKAGE OPTION
SGM2019-1.2	1.2V	SC70-5	SGM2019-1.2YC5G/TR	YJ12	Tape and Reel, 3000
SGM2019-1.2	1.2V	SOT23-5	SGM2019-1.2YN5G/TR	YJ12	Tape and Reel, 3000
SGM2019-1.3	1.3V	SC70-5	SGM2019-1.3YC5G/TR	YJ13	Tape and Reel, 3000
SGM2019-1.3	1.3V	SOT23-5	SGM2019-1.3YN5G/TR	YJ13	Tape and Reel, 3000
SGM2019-1.5	1.5V	SC70-5	SGM2019-1.5YC5G/TR	YJ15	Tape and Reel, 3000
SGM2019-1.5	1.5V	SOT23-5	SGM2019-1.5YN5G/TR	YJ15	Tape and Reel, 3000
SGM2019-1.8	1.8V	SC70-5	SGM2019-1.8YC5G/TR	YJ18	Tape and Reel, 3000
SGM2019-1.8	1.8V	SOT23-5	SGM2019-1.8YN5G/TR	YJ18	Tape and Reel, 3000
SGM2019-2.1	2.1V	SC70-5	SGM2019-2.1YC5G/TR	YJ21	Tape and Reel, 3000
SGM2019-2.1	2.1V	SOT23-5	SGM2019-2.1YN5G/TR	YJ21	Tape and Reel, 3000
SGM2019-2.5	2.5V	SC70-5	SGM2019-2.5YC5G/TR	YJ25	Tape and Reel, 3000
SGM2019-2.5	2.5V	SOT23-5	SGM2019-2.5YN5G/TR	YJ25	Tape and Reel, 3000
SGM2019-2.6	2.6V	SC70-5	SGM2019-2.6YC5G/TR	YJ26	Tape and Reel, 3000
SGM2019-2.6	2.6V	SOT23-5	SGM2019-2.6YN5G/TR	YJ26	Tape and Reel, 3000
SGM2019-2.7	2.7V	SC70-5	SGM2019-2.7YC5G/TR	YJ27	Tape and Reel, 3000
SGM2019-2.7	2.7V	SOT23-5	SGM2019-2.7YN5G/TR	YJ27	Tape and Reel, 3000
SGM2019-2.8	2.8V	SC70-5	SGM2019-2.8YC5G/TR	YJ28	Tape and Reel, 3000
SGM2019-2.8	2.8V	SOT23-5	SGM2019-2.8YN5G/TR	YJ28	Tape and Reel, 3000
SGM2019-2.85	2.85V	SC70-5	SGM2019-2.85YC5G/TR	YJ2J	Tape and Reel, 3000
SGM2019-2.85	2.85V	SOT23-5	SGM2019-2.85YN5G/TR	YJ2J	Tape and Reel, 3000
SGM2019-2.9	2.9V	SC70-5	SGM2019-2.9YC5G/TR	YJ29	Tape and Reel, 3000
SGM2019-2.9	2.9V	SOT23-5	SGM2019-2.9YN5G/TR	YJ29	Tape and Reel, 3000
SGM2019-3.0	3.0V	SC70-5	SGM2019-3.0YC5G/TR	YJ30	Tape and Reel, 3000
SGM2019-3.0	3.0V	SOT23-5	SGM2019-3.0YN5G/TR	YJ30	Tape and Reel, 3000
SGM2019-3.1	3.1V	SC70-5	SGM2019-3.1YC5G/TR	YJ31	Tape and Reel, 3000
SGM2019-3.1	3.1V	SOT23-5	SGM2019-3.1YN5G/TR	YJ31	Tape and Reel, 3000
SGM2019-3.2	3.2V	SC70-5	SGM2019-3.2YC5G/TR	YJ32	Tape and Reel, 3000
SGM2019-3.2	3.2V	SOT23-5	SGM2019-3.2YN5G/TR	YJ32	Tape and Reel, 3000
SGM2019-3.3	3.3V	SC70-5	SGM2019-3.3YC5G/TR	YJ33	Tape and Reel, 3000
SGM2019-3.3	3.3V	SOT23-5	SGM2019-3.3YN5G/TR	YJ33	Tape and Reel, 3000
SGM2019-3.6	3.6V	SC70-5	SGM2019-3.6YC5G/TR	YJ36	Tape and Reel, 3000
SGM2019-3.6	3.6V	SOT23-5	SGM2019-3.6YN5G/TR	YJ36	Tape and Reel, 3000
SGM2019-4.2	4.2V	SC70-5	SGM2019-4.2YC5G/TR	YJ42	Tape and Reel, 3000
SGM2019-4.2	4.2V	SOT23-5	SGM2019-4.2YN5G/TR	YJ42	Tape and Reel, 3000
SGM2019-5.0	5.0V	SC70-5	SGM2019-5.0YC5G/TR	YJ50	Tape and Reel, 3000
SGM2019-5.0	5.0V	SOT23-5	SGM2019-5.0YN5G/TR	YJ50	Tape and Reel, 3000
SGM2019-ADJ	adjustable	SC70-5	SGM2019-ADJYC5G/TR	YJAA	Tape and Reel, 3000
SGM2019-ADJ	adjustable	SOT23-5	SGM2019-ADJYN5G/TR	YJAA	Tape and Reel, 3000


NOTE: SC70-5 package is same as SOT-353 package.



SG Micro Limited
www.sg-micro.com

PACKAGE OUTLINE DIMENSIONS


SC70-5 / SOT-353

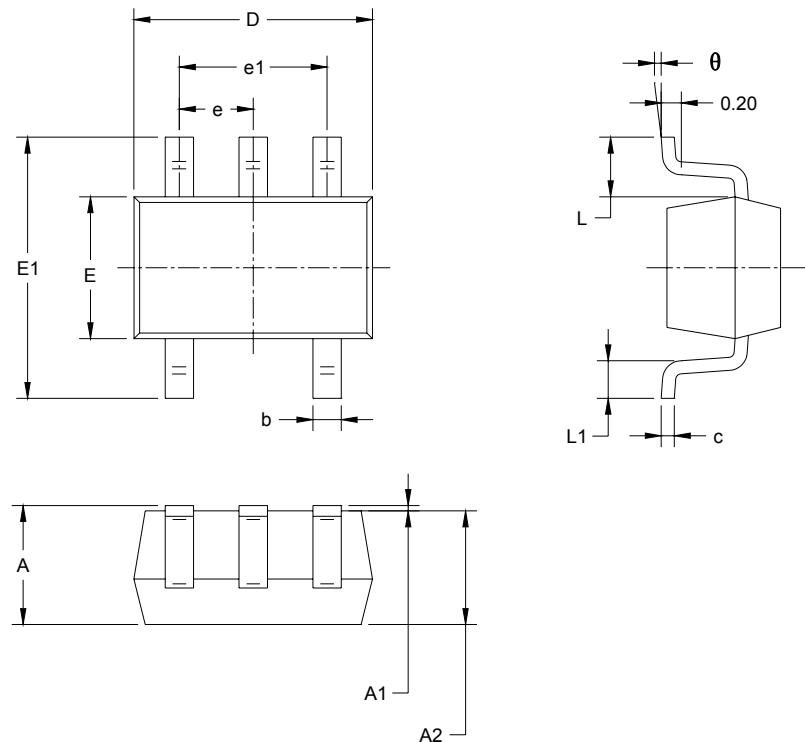

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.65 TYP		0.026 TYP	
e1	1.300 BSC		0.051 BSC	
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

SOT23-5

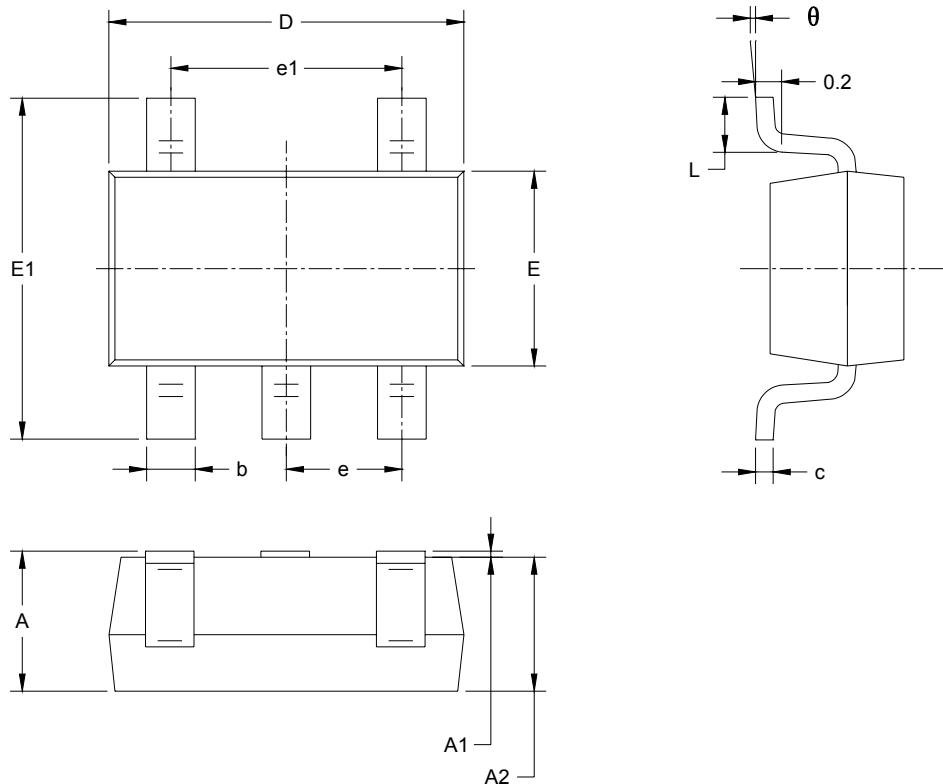

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°