

RVE-UE Series

LOW IMPEDANCE 低阻抗品


- Low impedance with temperature range -55 ~ +105 °C
低阻抗和适用于-55~+105℃的温度范围
- Load life of 1000 ~ 2000 hours
负荷寿命1000~2000小时
- Comply with the RoHS directive
符合RoHS指令



主要技术性能 Specification

| 项目 Item | 特性 Performance Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|------|------|------|------|------|--------------------|--|-----|----|----|----|----|----|--------|--------------------|------|------|------|------|------|------|--------------------|------|------|------|------|------|------|-----------|--------------------|---|---|---|---|---|---|--------------------|----|---|---|---|---|---|
| 使用温度范围 Operating temperature range | -55 ~ +105 °C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 额定电压范围 Rated voltage range | 4 ~ 100V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 标称电容量范围 Nominal capacitance range | 0.1 ~ 6800μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 标称电容量允许偏差 Capacitance tolerance | ± 20% (120Hz, +20°C) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 漏电流 Leakage current | $I \leq 0.01CV$ 或 $3(\mu A)$ 2分钟 取较大者 (at 20°C, after 2 minutes) (whichever is greater) | $I \leq 0.02CV + 15(\mu A)$ 1分钟 (1 minute) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 损耗角正切值 (tg δ) Dissipation factor (+20°C, 120Hz) | <table border="1"> <thead> <tr> <th colspan="2">U_R (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">tg δ</td> <td>∅4~∅10</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> </tr> <tr> <td>∅12.5~∅16</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table> | | | | | | | U _R (V) | | 6.3 | 10 | 16 | 25 | 35 | 50 | tg δ | ∅4~∅10 | 0.22 | 0.19 | 0.16 | 0.14 | 0.12 | 0.12 | ∅12.5~∅16 | 0.26 | 0.22 | 0.18 | 0.16 | 0.14 | 0.12 | | | | | | | | | | | | | | | |
| U _R (V) | | 6.3 | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| tg δ | ∅4~∅10 | 0.22 | 0.19 | 0.16 | 0.14 | 0.12 | 0.12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | ∅12.5~∅16 | 0.26 | 0.22 | 0.18 | 0.16 | 0.14 | 0.12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 温度特性 Temperature characteristics (Impedance ratio at 120Hz) | <table border="1"> <thead> <tr> <th colspan="2">U_R (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">∅4~∅10</td> <td>Z(-25°C) / Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C) / Z(20°C)</td> <td>5</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td rowspan="2">∅12.5~∅16</td> <td>Z(-25°C) / Z(20°C)</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C) / Z(20°C)</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> | | | | | | | U _R (V) | | 6.3 | 10 | 16 | 25 | 35 | 50 | ∅4~∅10 | Z(-25°C) / Z(20°C) | 2 | 2 | 2 | 2 | 2 | 2 | Z(-55°C) / Z(20°C) | 5 | 4 | 4 | 3 | 3 | 3 | ∅12.5~∅16 | Z(-25°C) / Z(20°C) | 3 | 3 | 2 | 2 | 2 | 2 | Z(-55°C) / Z(20°C) | 10 | 8 | 6 | 4 | 3 | 3 |
| U _R (V) | | 6.3 | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ∅4~∅10 | Z(-25°C) / Z(20°C) | 2 | 2 | 2 | 2 | 2 | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Z(-55°C) / Z(20°C) | 5 | 4 | 4 | 3 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ∅12.5~∅16 | Z(-25°C) / Z(20°C) | 3 | 3 | 2 | 2 | 2 | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Z(-55°C) / Z(20°C) | 10 | 8 | 6 | 4 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 耐久性 Load life | After 2000 hrs. (1000 hrs. for ∅4~∅6.3x5.4) application of the rated voltage at 105°C, they meet the characteristics listed below. 在105℃环境中施加额定工作电压2000小时(∅4~∅6.3x5.4为1000小时)后,电容器的特性符合下表的要求。 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏电流 Leakage current : ≤初始规定值 ≤the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 高温贮存 Shelf life | +105°C, 1000小时贮存后,恢复16小时后: After storage for 1000 hours at +105°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±10%初始测量值以内 10% of the initial measured value 漏电流 Leakage current : ≤2倍初始规定值 ≤2times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

外形图及尺寸图 Case size table

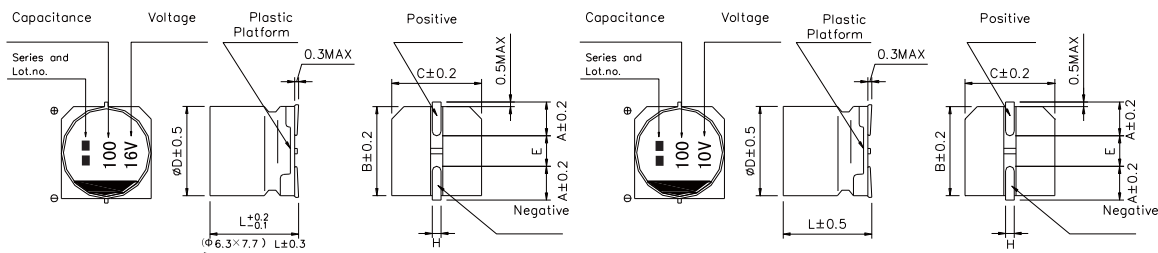

*1. Voltage mark for 6.3V is [6V] 6.3V的产品标识为 [6V]
 *2. Applicable to ∅6.3x7.7 适用于∅6.3x7.7
 *3. Applicable to ∅8x10.5~∅10 适用于∅8x10.5~∅10
 *4. Applicable to ∅12.5~∅16 适用于∅12.5~∅16

V-CHIP

| ∅D x L | 4 x 5.4 | 5 x 5.4 | 6.3 x 5.4 | 6.3 x 7.7 | 8 x 6.2 | 8 x 10.5 | 10 x 10.5 | 10 x 13.5 | 12.5 x 13.5 | 12.5 x 16 | 16 x 16.5 |
|---------|---------|---------|-----------|-----------|---------|----------|-----------|-----------|-------------|-----------|-----------|
| A | 1.8 | 2.1 | 2.4 | 2.4 | 3.3 | 2.9 | 3.2 | 3.2 | 4.7 | 4.7 | 5.5 |
| B | 4.3 | 5.3 | 6.6 | 6.6 | 8.3 | 8.3 | 10.3 | 10.3 | 13.0 | 13.0 | 17.0 |
| C | 4.3 | 5.3 | 6.6 | 6.6 | 8.3 | 8.3 | 10.3 | 10.3 | 13.0 | 13.0 | 17.0 |
| E ± 0.2 | 1.0 | 1.3 | 2.2 | 2.2 | 2.2 | 3.1 | 4.4 | 4.4 | 4.4 | 4.4 | 6.7 |
| L | 5.4 | 5.4 | 5.4 | 7.7 | 6.2 | 10.5 | 10.5 | 13.5 | 13.5 | 16.0 | 16.5 |

■ 尺寸 Dimensions

| μF | WV Code 代码 | 6.3 | | | 10 | | | 16 | | |
|------|------------------|----------------------------|----------------|--------------|----------------------------|----------------|--------------|--------------------------|----------------|---------------|
| | | 0J | | | 1A | | | 1C | | |
| 10 | 100 | | | | | | | 4 x 5.4 | 3.0 | 60 |
| 15 | 150 | | | | | | | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) |
| 22 | 220 | 4 x 5.4 | 3.0 | 60 | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) |
| 33 | 330 | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) |
| 47 | 470 | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) |
| 68 | 680 | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) | 6.3 x 5.4 | 1.0 | 140 | 6.3 x 7.7 (6.3 x 5.4) | 0.6 (1.0) | 230 (140) |
| 100 | 101 | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) | 6.3 x 7.7 (6.3 x 5.4) | 0.6 (1.0) | 230 (140) | 6.3 x 7.7 (6.3 x 5.4) | 0.6 (1.0) | 230 (140) |
| 150 | 151 | 6.3 x 7.7 (6.3 x 5.4) | 0.6 (1.0) | 230 (140) | 6.3 x 7.7 (6.3 x 5.4) | 0.6 (1.0) | 230 (140) | 6.3 x 7.7 | 0.6 | 230 |
| 220 | 221 | 6.3 x 7.7 (6.3 x 5.4) | 0.6 (1.0) | 230 (140) | 6.3 x 7.7 | 0.6 | 230 | 8 x 10.5 (6.3 x 7.7) | 0.30 (0.6) | 450 (230) |
| 330 | 331 | 6.3 x 7.7 | 0.6 | 230 | 8 x 10.5 | 0.30 | 450 | 10 x 10.5 (8 x 10.5) | 0.15 (0.30) | 670 (450) |
| 470 | 471 | 8 x 10.5 | 0.30 | 450 | 8 x 10.5 | 0.30 | 450 | 10 x 10.5 (8 x 10.5) | 0.15 (0.30) | 670 (450) |
| 680 | 681 | 8 x 10.5 | 0.30 | 450 | 10 x 10.5 | 0.15 | 670 | 10 x 10.5 | 0.15 | 670 |
| 1000 | 102 | 10 x 10.5 (8 x 10.5) | 0.15 (0.30) | 670 (450) | 10 x 10.5 | 0.15 | 670 | 10 x 10.5 | 0.15 | 670 |
| 1500 | 152 | 10 x 13.5 (10 x 10.5) | 0.13 (0.15) | 750 (670) | 12.5 x 13.5 (10 x 13.5) | 0.11 (0.13) | 820 (750) | 12.5 x 13.5 | 0.11 | 820 |
| 2200 | 222 | 12.5 x 13.5 (10 x 13.5) | 0.11 (0.13) | 820 (750) | 12.5 x 16 | 0.09 | 950 | 16 x 16.5 (12.5 x 16) | 0.08 (0.09) | 1260 (950) |
| 3300 | 332 | 12.5 x 16 (12.5 x 13.5) | 0.09 (0.11) | 950 (820) | 16 x 16.5 | 0.08 | 1260 | 16 x 16.5 | 0.08 | 1260 |
| 4700 | 472 | 16 x 16.5 | 0.08 | 1260 | 16 x 16.5 | 0.08 | 1260 | | | |

| μF | WV Code 代码 | 25 | | | 35 | | | 50 | | |
|-----|------------------|--------------------------|---------------|--------------|--------------------------|---------------|--------------|--------------------------------|--|---|
| | | 1E | | | 1V | | | 1H | | |
| 1 | 010 | | | | 4 x 5.4 | 3.0 | 60 | 4 x 5.4 | 5.0 | 30 |
| 1.5 | 1R5 | | | | 4 x 5.4 | 3.0 | 60 | 4 x 5.4 | 5.0 | 30 |
| 2.2 | 2R2 | | | | 4 x 5.4 | 3.0 | 60 | 4 x 5.4 | 5.0 | 30 |
| 3.3 | 3R3 | | | | 4 x 5.4 | 3.0 | 60 | 4 x 5.4 | 5.0 | 30 |
| 4.7 | 4R7 | 4 x 5.4 | 3.0 | 60 | 4 x 5.4 | 3.0 | 60 | 5 x 5.4 | 3.0 | 50 |
| 6.8 | 6R8 | 4 x 5.4 | 3.0 | 60 | 5 x 5.4 | 1.8 | 95 | 6.3 x 5.4 | 2.0 | 70 |
| 10 | 100 | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) | 5 x 5.4 (4 x 5.4) | 1.8 (3.0) | 95 (60) | 6.3 x 5.4 | 2.0 | 70 |
| 15 | 150 | 6.3 x 5.4 | 1.8 | 95 | 5 x 5.4 | 1.8 | 95 | 6.3 x 5.4 | 2.0 | 70 |
| 22 | 220 | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) | 6.3 x 7.7 (6.3 x 5.4) | 1.0 (2.0) | 120 (70) |
| 33 | 330 | 6.3 x 5.4 (5 x 5.4) | 1.0 (1.8) | 140 (95) | 6.3 x 5.4 | 1.0 | 140 | 6.3 x 7.7 | 1.0 | 120 |
| 47 | 470 | 6.3 x 7.7 (6.3 x 5.4) | 0.6 (1.0) | 230 (140) | 6.3 x 7.7 (6.3 x 5.4) | 0.60 (1.0) | 230 (140) | 6.3 x 7.7 | 1.0 | 120 |
| 68 | 680 | 6.3 x 7.7 | 0.6 | 230 | 6.3 x 7.7 | 0.60 | 230 | 8 x 10.5 | 0.60 | 300 |
| 100 | 101 | 6.3 x 7.7 | 0.6 | 230 | 8 x 10.5 | 0.30 | 450 | 8 x 10.5 | 0.60 | 300 |
| 150 | 151 | 8 x 10.5 (6.3 x 7.7) | 0.30 (0.6) | 450 (230) | 8 x 10.5 | 0.30 | 450 | 10 x 10.5 | 0.30 | 500 |
| | | | | | | | | Case size ∅D x L (mm) 尺寸 | Impedance (Ω) at 20°C 100KHz 阻抗值 | Ripple current (mA rms) at 105°C 100KHz 纹波电流 |

V-Chip

■ 尺寸 Dimensions

| μF | Code 代码 | 25 | | | 35 | | | 50 | | |
|------|------------|----------------------------|----------------|---------------|----------------------------|----------------|---------------|---|---|--|
| | | 1E | | | 1V | | | 1H | | |
| 220 | 221 | 8 × 10.5 | 0.30 | 450 | 10 × 10.5 (8 × 10.5) | 0.15 (0.30) | 670 (450) | 10 × 10.5 | 0.30 | 500 |
| 330 | 331 | 10 × 10.5 (8 × 10.5) | 0.15 (0.30) | 670 (450) | 10 × 10.5 | 0.15 | 670 | 16 × 16.5 (12.5 × 13.5) (10 × 13.5) | 0.12 (0.20) (0.25) | 1060 (650) (580) |
| 470 | 471 | 10 × 10.5 | 0.15 | 670 | 10 × 10.5 | 0.15 | 670 | 16 × 16.5 (12.5 × 16) | 0.12 (0.15) | 1060 (700) |
| 680 | 681 | 10 × 13.5 | 0.13 | 750 | 12.5 × 13.5 (10 × 13.5) | 0.11 (0.13) | 820 (750) | 16 × 16.5 | 0.12 | 1060 |
| 1000 | 102 | 16 × 16.5 (12.5 × 13.5) | 0.08 (0.11) | 1260 (820) | 16 × 16.5 (12.5 × 16) | 0.08 (0.09) | 1260 (950) | | | |
| 1500 | 152 | 12.5 × 16 | 0.09 | 950 | 16 × 16.5 | 0.08 | 1260 | Case size ∅D×L(mm) 尺寸 | Impedance (Ω) at 20°C 100KHz 阻抗值 | Ripple current (mA rms) at 105°C 100KHz 纹波电流 |
| 2200 | 222 | 16 × 16.5 | 0.08 | 1260 | | | | | | |

■ 纹波电流的相关参数 Multiplier For Ripple Current

| Frequency 频率 | | 50Hz | 120Hz | 300Hz | 1KHz | 10KHz- | |
|-------------------|-----------|-------------|-------|-------|------|--------|------|
| Coefficient 系数 | Φ4-Φ10 | 1-68uF | 0.35 | 0.50 | 0.64 | 0.83 | 1.00 |
| | | 100-2200uF | 0.40 | 0.55 | 0.70 | 0.85 | 1.00 |
| | Φ12.5-Φ16 | -680uF | 0.45 | 0.65 | 0.80 | 0.90 | 1.00 |
| | | 1000-4700uF | 0.65 | 0.85 | 0.95 | 1.00 | 1.00 |