



Gas Discharge Tubes

2RB-8 Series

Gas Discharge Tubes - 2RB-8 Series

Gas discharge tubes (GDT) use noble gasses enclosed in ceramic tubes to provide an alternate circuit path for voltage spikes. The ceramic envelope and with nickel connectors allow for high loads and Ruilon offers products that function at 0.5KA-200KA. The breakdown voltages of the devices have a wide range (up to 20% tolerance). Major applications are high frequency telecommunication lines, stations, security systems, HID and high quality Surge Protection Devices (SPD).

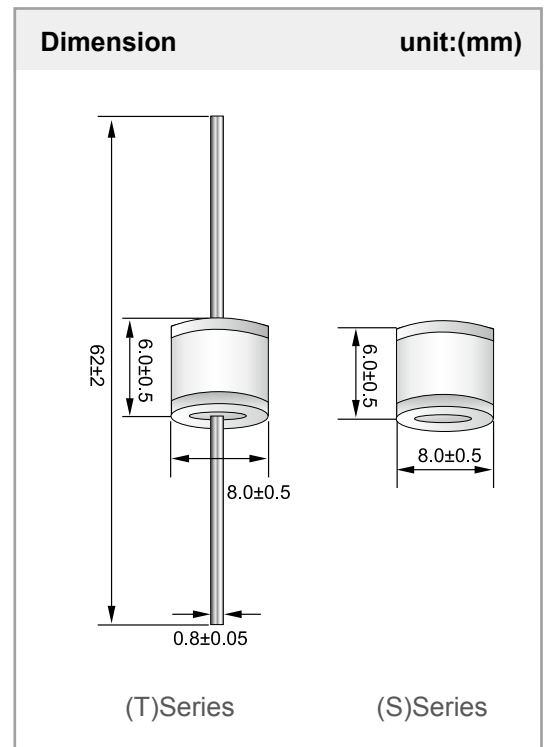


Features

- RoHS & HF compliant
- Size: 8.0mm*6.0mm
- DC Spark-over voltage: 70~800V
- Stable breakdown voltage
- High insulation resistance
- Low capacitance (<1.5pF)
- High holdover voltage
- Large absorbing transient current capability
- Storage and operational temperature: -40°C ~ +85°C

Recommended Applications

- Cable Modem
- Repeaters, Modems.
- Set-Top Box
- Satellite and CATV equipment
- Power supplier
- Consumer electronics
- General telecom equipment



Product Name

2	R	X	X	X	X	B	-	8
↓		↓			↓	↓	↓	
Electrode Numbers 2R : 2 Electrodes		DC Spark-over Voltage			Lead Type T: Thrust S: SMD	Electrical Characteristics B: 10KA	Dimensions 8.0mm*6.0mm	

Gas Discharge Tubes - 2RB-8 Series

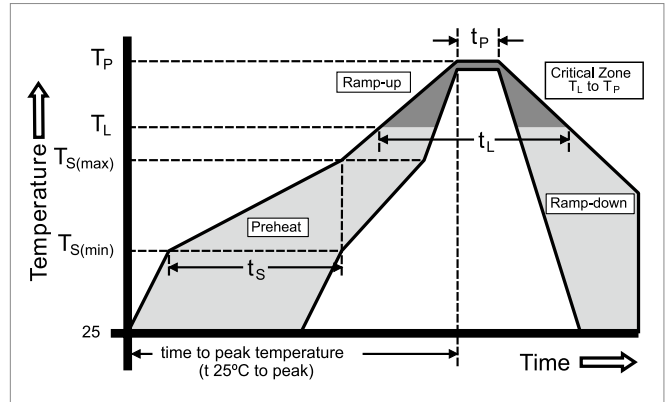
Electrical Characteristics

Part Number		DC Spark-over Voltage	Maximum Impulse Breakdown Voltage		Maximum Impulse Discharge Current (8/20 μ s)		Impulse Life (10/1000 μ s)	Normal Alternating Discharge Current	DC Holdover Voltage	Minimum Insulation Resistance	Maximum Capacitance (1MHz)
			100V/ μ s	1KV/ μ s	1 time	10 times					
DIP	SMD	(V)	(V)	(V)	(KA)		Times	(A)	(V)	(G Ω)	(pF)
2R070TB-8	2R070SB-8	70 \pm 20%	500	600	20	10	500	10	52	1	1.5
2R075TB-8	2R075SB-8	75 \pm 20%	500	600	20	10	500	10	52	1	1.5
2R090TB-8	2R090SB-8	90 \pm 20%	500	600	20	10	500	10	52	1	1.5
2R120TB-8	2R120SB-8	120 \pm 20%	500	700	20	10	500	10	52	1	1.5
2R130TB-8	2R130SB-8	130 \pm 20%	500	700	20	10	500	10	52	1	1.5
2R150TB-8	2R150SB-8	150 \pm 20%	500	700	20	10	500	10	52	1	1.5
2R230TB-8	2R230SB-8	230 \pm 20%	500	700	20	10	500	10	80	1	1.5
2R250TB-8	2R250SB-8	250 \pm 20%	500	700	20	10	500	10	135	1	1.5
2R300TB-8	2R300SB-8	300 \pm 20%	700	900	20	10	500	10	135	1	1.5
2R350TB-8	2R350SB-8	350 \pm 20%	700	900	20	10	500	10	135	1	1.5
2R400TB-8	2R400SB-8	400 \pm 20%	800	1000	20	10	500	10	135	1	1.5
2R420TB-8	2R420SB-8	420 \pm 20%	800	1000	20	10	500	10	135	1	1.5
2R470TB-8	2R470SB-8	470 \pm 20%	900	1100	20	10	500	10	135	1	1.5
2R600TB-8	2R600SB-8	600 \pm 20%	1100	1300	20	10	500	10	135	1	1.5
2R800TB-8	2R800SB-8	800 \pm 20%	1300	1500	20	10	500	10	135	1	1.5

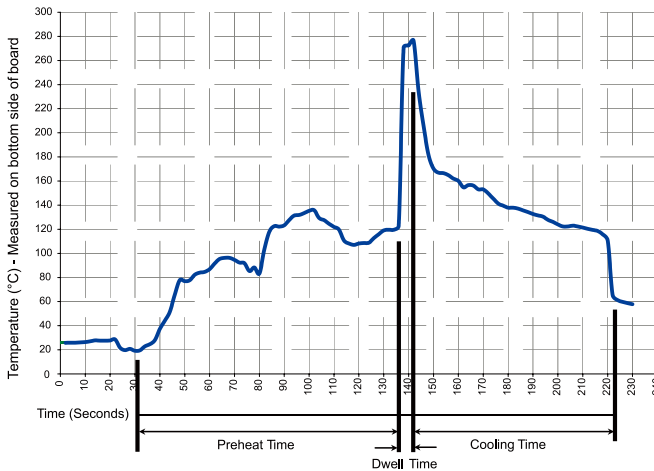
Gas Discharge Tubes - 2RB-8 Series

Soldering parameters reflow soldering(surface mount devices)

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (Min to Max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		5°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		10 – 30 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8minutes Max.
Do not exceed		260°C



Soldering parameters -wave soldering



Recommended process parameters

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100° C
Temperature Maximum:	150° C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	280° C Maximum
Solder Dwell Time:	2-5 seconds

Gas Discharge Tubes - 2RB-8 Series

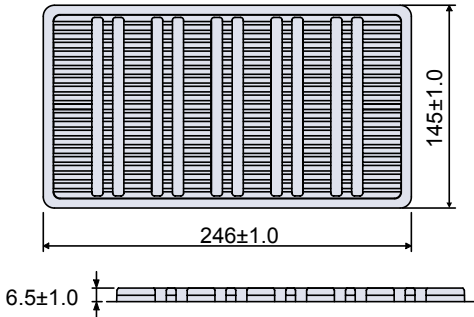
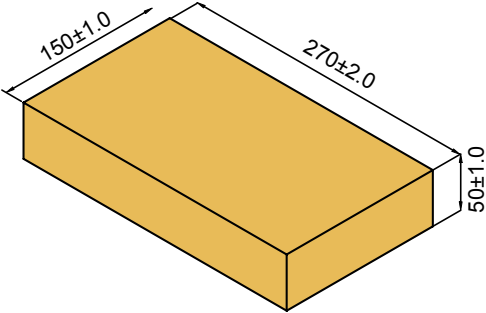
Warehouse Storage Condition

Item	Test Condition / Description	Requirement														
DC Breakdown Voltage	The voltage measured at a rise time of 100v/s.	To meet the specified value														
Maximum Impulse Breakdown Voltage	The maximum breakdown voltage at rise times of 100v/us and 1000v/us.															
Maximum Impulse Discharge Current	The maximum current applying a waveform of 8/20us that can be applied across the terminals of the gas tube without causing the gas tube to change more than $\pm 25\%$ from its initial measured DC breakdown voltage. Dwell time between pulses is 3 minutes.															
Alternating Discharge Current	Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. DC breakdown voltage may not change more than $\pm 25\%$ from its initial measured DC breakdown voltage. $IR > 10^8$ ohms (-20%, +30% for 70 – 90V).															
Impulse Life	The minimum number of impulses of a specified waveform and peak current which a gas tube will conduct without causing the gas tube to change more than $\pm 25\%$ from its initial measured DC breakdown voltage. Dwell time between pulses is 1-2 minutes.															
DC Holdover Voltage	The maximum DC voltage across the two terminals of the gas tube under which it may be expected to return to the high impedance state after the gas tube breakdown.															
Insulation Resistance	<p>The resistance of the gas tube shall be measured each terminal to each other terminal.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="text-align: center;">DC Breakdown Voltage (V)</th> <th style="text-align: center;">DC Measuring Voltage (V)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">70</td> <td style="text-align: center;">25</td> </tr> <tr> <td style="text-align: center;">90-150</td> <td style="text-align: center;">50</td> </tr> <tr> <td style="text-align: center;">230-350</td> <td style="text-align: center;">100</td> </tr> <tr> <td style="text-align: center;">470-600</td> <td style="text-align: center;">250</td> </tr> <tr> <td style="text-align: center;">800</td> <td style="text-align: center;">500</td> </tr> <tr> <td style="text-align: center;">1000-1600</td> <td style="text-align: center;">1000</td> </tr> </tbody> </table>		DC Breakdown Voltage (V)	DC Measuring Voltage (V)	70	25	90-150	50	230-350	100	470-600	250	800	500	1000-1600	1000
DC Breakdown Voltage (V)	DC Measuring Voltage (V)															
70	25															
90-150	50															
230-350	100															
470-600	250															
800	500															
1000-1600	1000															
Capacitance	The capacitance of a gas tube shall be measured each terminal to each other terminal. Test frequency: 1MHz In measurements involving 3-electrode gas tubes, the terminal not being tested shall be connected to a ground plane.															

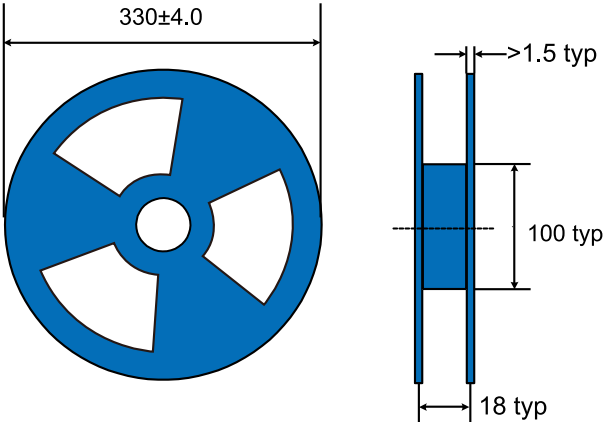
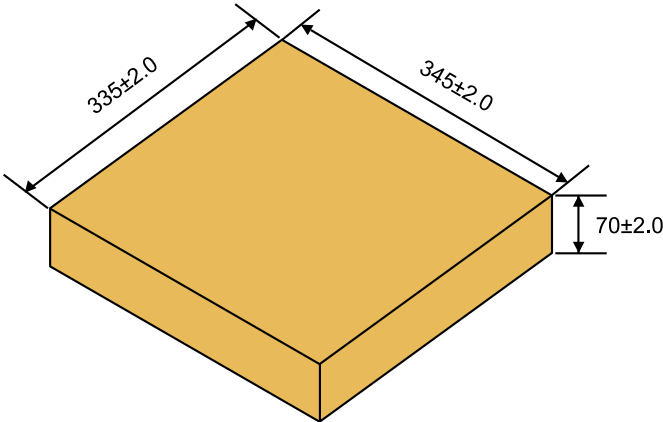
Gas Discharge Tubes - 2RB-8 Series

Packaging Taping

Axial Packing (Bulk)

Skin packing (264×145×7mm)	Inner Box (270×150×50mm)
	
100 PCS/ Plastic Tray	500 PCS/ Box

SMD Packing (Tape & Reel)

Reel packing (330×330×18mm)	Inner Box (335×345×70mm)
	
900 PCS/ Reel	2700 PCS/ Box

RuiLongYuan Electronics Co., Ltd.

- Reproducing and modifying information of the document is prohibited without permission from Ruilongyuan International Inc.
- Ruilongyuan International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Ruilongyuan International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Ruilongyuan International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Ruilongyuan International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ruilongyuan International Inc. for any damages resulting from such improper use or sale.

Tel: +86-755-8290 8296

Fax: +86-755-8290 8002

E-mail: jack@ruilon.com