




DSF1A THRU DSF1J

SURFACE MOUNT SUPER FAST RECTIFIER
Reverse Voltage - 50 to 600 Volts Forward Current - 1.0 Ampere

SOD-123FL

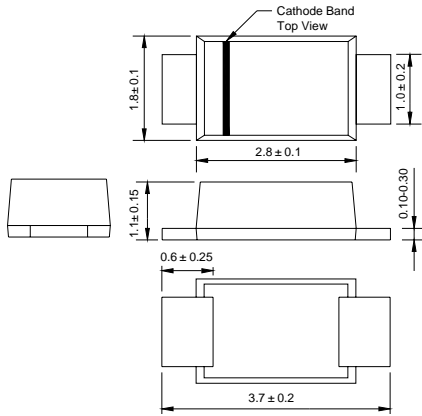

Dimensions in millimeters

FEATURES

- ◆ Glass passivated device
- ◆ Ideal for surface mounted applications
- ◆ Low reverse leakage
- ◆ Metallurgically bonded construction
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC SOD-123FL molded plastic body over passivated chip
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.0007 ounce, 0.02 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	DSF1A E1A	DSF1B E1B	DSF1C E1C	DSF1D E1D	DSF1E E1E	DSF1G E1G	DSF1J E1J	UNITS	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	VOLTS	
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	VOLTS	
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	VOLTS	
Maximum average forward rectified current at $T_a=65^\circ\text{C}$	$I_{(AV)}$	1.0							Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0							Amps	
Maximum instantaneous forward voltage at 1.0A	V_F	0.95			1.25		1.7		Volts	
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	5.0					100.0			μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	35					ns			
Typical junction capacitance (NOTE 2)	C_J	10					pF			
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	85					$^\circ\text{C/W}$			
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$	

- Note:** 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3. PCB mounted on 0.2*0.2" (5.0*5.0mm) copper pad area.



RATINGS AND CHARACTERISTIC CURVES DSF1A THRU DSF1J

FIG. 1- FORWARD CURRENT DERATING CURVE

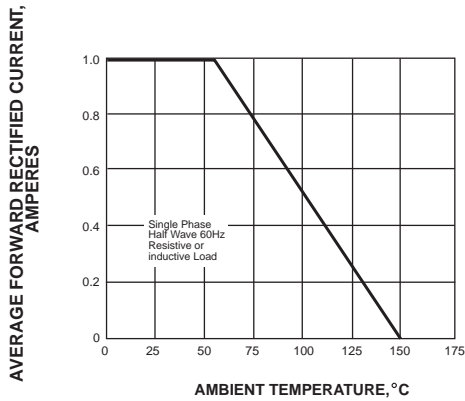


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

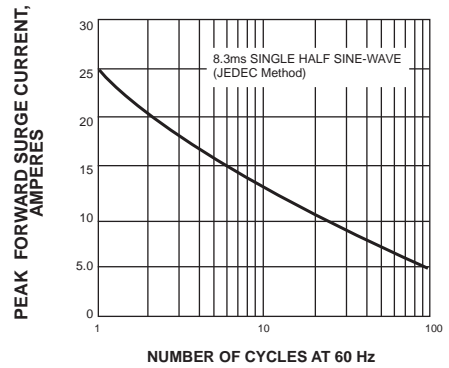


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

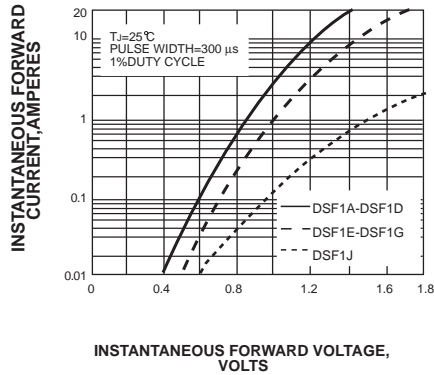


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

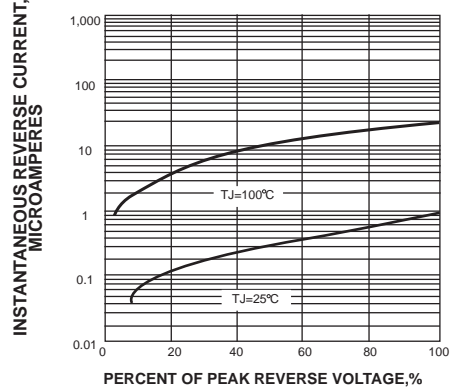


FIG. 5-TYPICAL JUNCTION CAPACITANCE


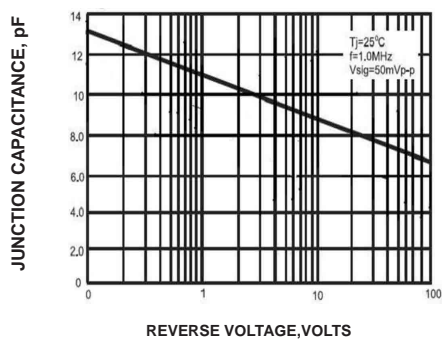


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE



The cruce graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

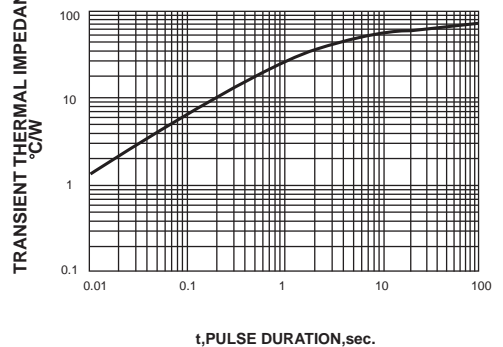