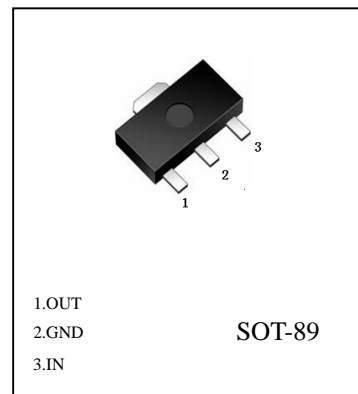


FEATURES

 Maximum Output current I_O : 0.1 A

 Output voltage V_O : 5 V

 Continuous total dissipation P_D : 0.5W ($T_a=25^\circ\text{C}$)

78L05

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0-125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65-150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($V_i=10\text{V}$, $I_o=40\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	V_o	25°C	4.8	5.0	5.2	V	
		0-125 $^\circ\text{C}$	7V V_i 20V, $I_o=1\text{mA}\sim 40\text{mA}$	4.75	5.0	5.25	V
			$I_o=1\text{mA}\sim 70\text{mA}$	4.75	5.0	5.25	V
Load Regulation	V_o	$I_o=1\text{mA}\sim 100\text{mA}$	25°C	15	60	mV	
		$I_o=1\text{mA}\sim 40\text{mA}$	25°C	8	30	mV	
Line regulation	V_o	7V V_i 20V		32	150	mV	
		8V V_i 20V	25°C	26	100	mV	
Quiescent Current	I_q		25°C	3.8	6	mA	
Quiescent Current Change	I_q	8V V_i 20V	0-125 $^\circ\text{C}$		1.5	mA	
	I_q	1mA V_i 40mA	0-125 $^\circ\text{C}$		0.1	mA	
Output Noise Voltage	V_N	10Hz f 100KHz	25°C	42		μV	
Ripple Rejection	RR	8V V_i 20V, $f=120\text{Hz}$	0-125 $^\circ\text{C}$	41	49	dB	
Dropout Voltage	V_d		25°C	1.7		V	

78L05 Typical Performance Characteristics
