
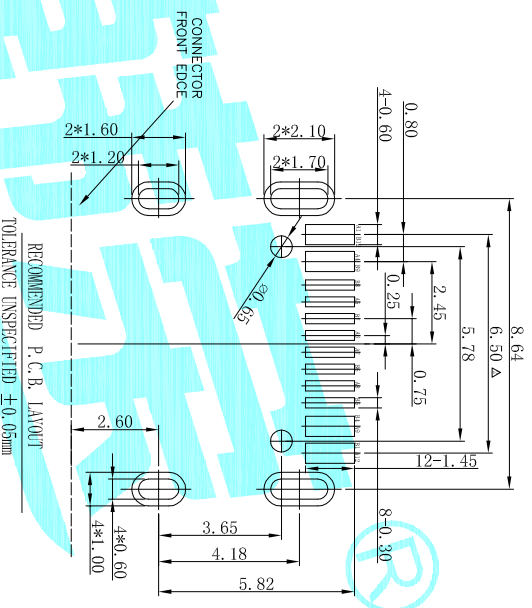


PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

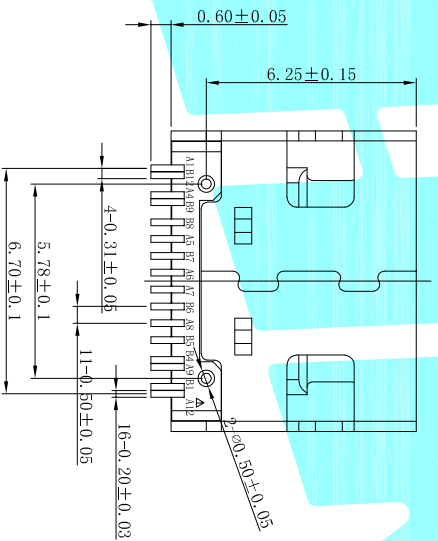

备注:
电气特性: Electrical:

1. 额定电流: 3A MIN ROR VBUS
0.25A MIN FOR OTHER
2. 接触阻抗: 40 milliohms MAX
3. 绝缘阻抗: 100MEGA ohms MIN
4. 耐压测试: 250V AC
5. 插拔力: Mate force: 2.0kgf (MAX)

6. 使用寿命: 10000次
 7. 工作温度: -55 ° C ~ 85 ° C
- 原材料: Material:
1. 塑胶: LCP+30%G. F UL94V-0
 2. 端子: Copper Alloy C5191
 3. 外壳: 不锈钢 T=0.30mm

APPROVALS		DATE		TITLE:		
DRAWN	JMIN. LU	2015.5.13		ELECTRONICS CO., LTD		
CHECKED				DETECTOR SWITCHS		
APPROVALS				PART NO.	TYPE-C-31-M-12	
TOLERANCES ARE		30° B.L.	±0.30	UNIT: mm	SCALE: 1:1	
		10:30	±0.20		PROJ:	
		5:10	±0.15			
		3	±0.10	DRAWING NO.	SHEET 1 OF 1	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			