



P.C.B LAYOUT(Copper-side view)

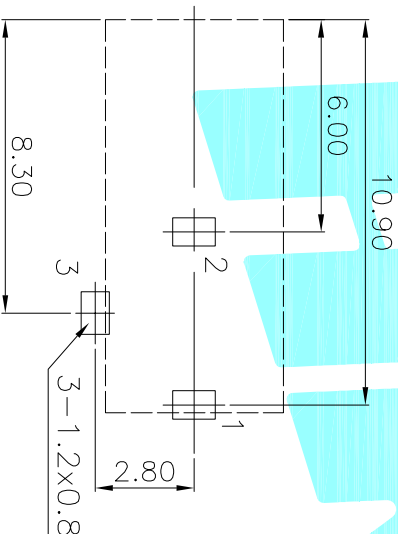

Model No.	1	2	3	4
PIN	$\phi 0.65$	$\phi 1.0$	$\phi 1.3$	$\phi 1.65$
DC PLUG O.D.	$\phi 2.35$	$\phi 3.5$	$\phi 3.5$	$\phi 4.0$

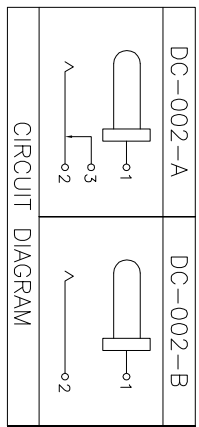

Rating:0.5A 30V DC  
 Contact Resistance:100 m $\Omega$  Max.  
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C  
 Operating force:3~20N  
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TER.NO. QTY.	MATERIAL	FINISHING
APPROVALS	DATE		
DRAWN J.X.Zhang	2018/07/31	ELECTRONICS CO.,LTD	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE				30~ $\phi$ 以上	$\pm 0.30$	ANGLE
				10~30	$\pm 0.20$	UNIT: mm
				5~10	$\pm 0.15$	SCALE: 1:1
				~5	$\pm 0.10$	PROJ:
					$\pm 2'$	DRAWING NO.
						SHEET 1 OF 1
						PHONE JACKES
						DC-002