ROHS

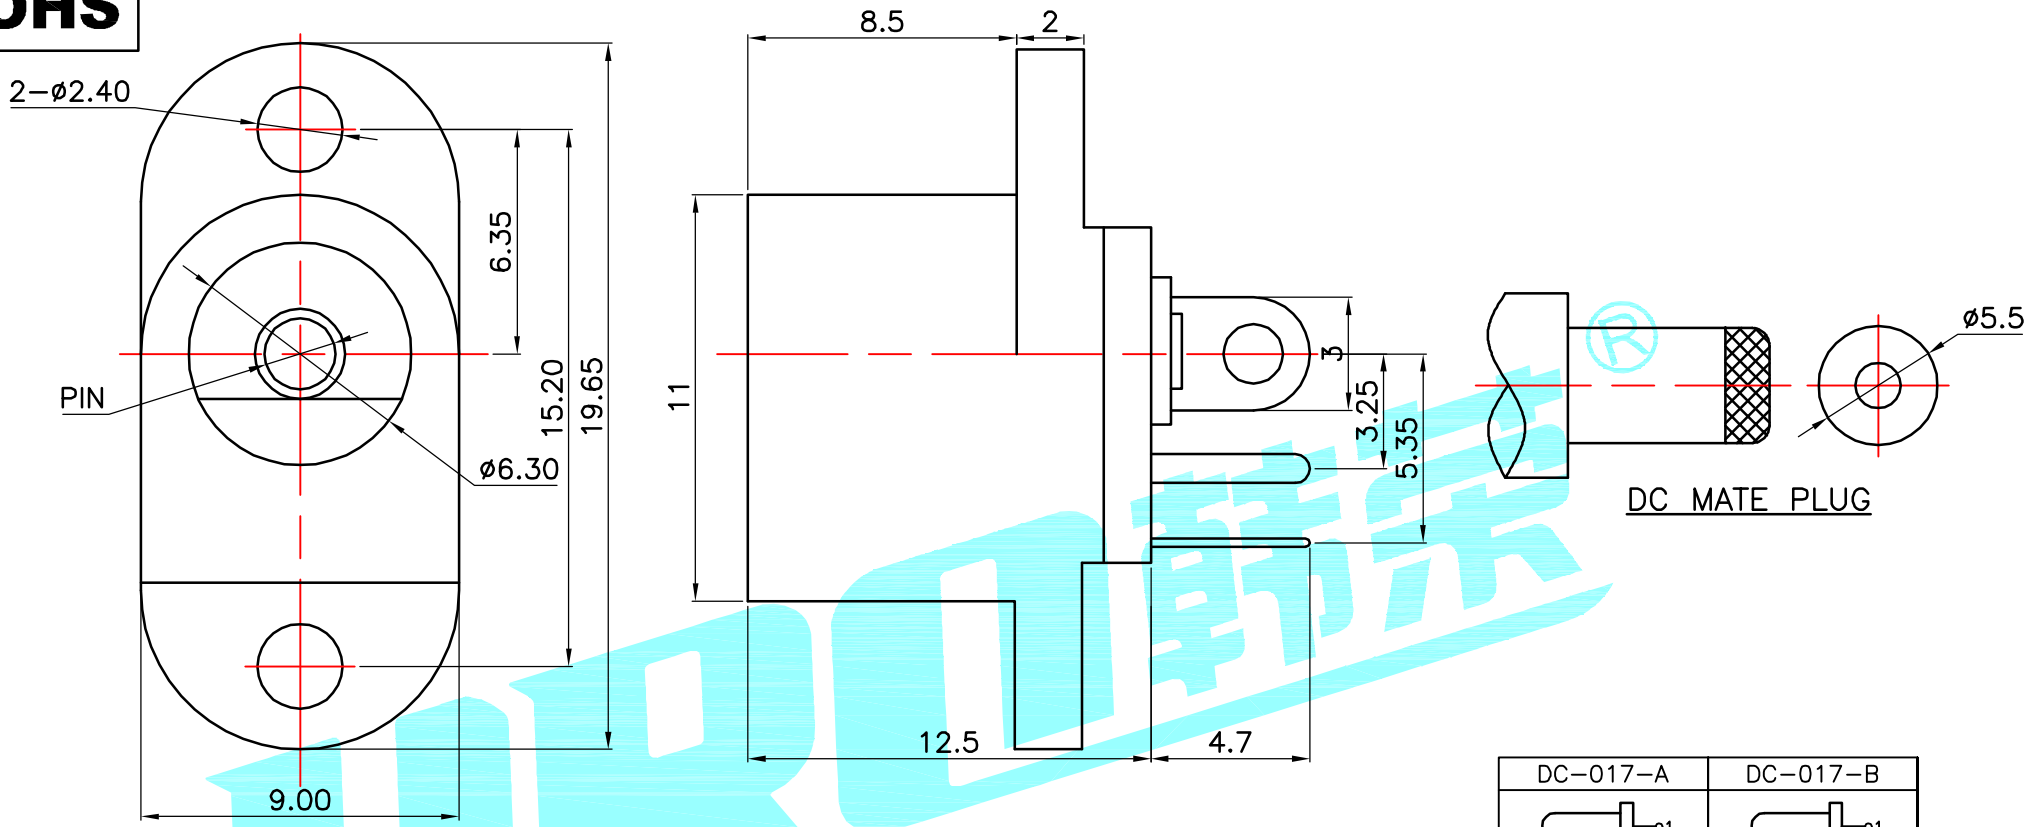

P.C.B LAYOUT(top view)

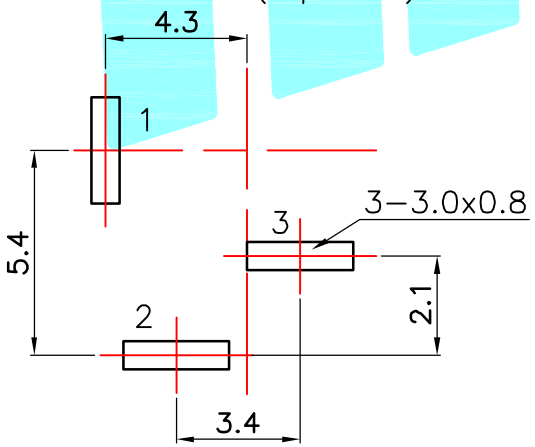

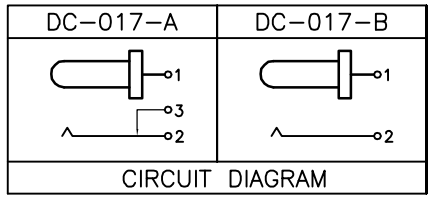

Model No.	1	2	3
PIN	ø2.0	ø2.35	ø2.5

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3−20N
Operating Life:5,000cycles

②	Terminal	——	3	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HRO精荣® ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2013/11/11			
CHECKED			TITLE:	PHONE JACKES	
APPROVALS			PART NO.	DC−017	
TOLERANCES ARE	30~以下 ±0.30 / 10~30 ±0.20 / 5~10 ±0.15 / ~5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1	PROJ:
			DRAWING NO.	——	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——