

Nano-Power, CMOS Input, RRIO, Push-Pull Output Comparator

FEATURES

- Low supply current
400nA (TYP) at $V_s = 1.4V$
- Low input offset voltage:
 $V_{os(max)} = \pm 3.5mV$
- Rail-to-Rail Input and output
- SUPPLY RANGE: +1.4V to +5.5V
- SPECIFIED UP TO +125°C
- *Micro* SIZE PACKAGES: SOT353(SC70-5), SOT23-5

APPLICATIONS

- OVERVOLTAGE AND UNDERVOLTAGE DETECTION
- MULTIVIBRATORS
- OVERCURRENT DETECTION
- SYSTEM MONITORING
- BATTERY POWERED SYSTEM

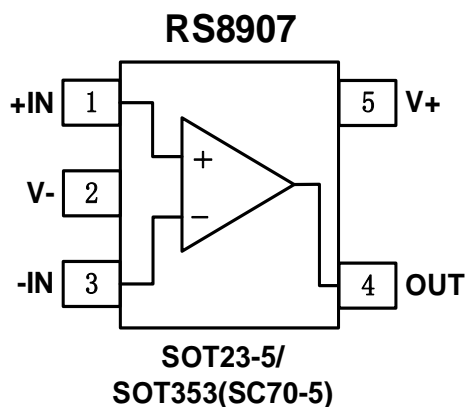
DESCRIPTION

The RS8907 offers a wide supply range, low quiescent current 400nA (TYP), and rail-to-rail inputs. All of these features come in industry-standard and extremely small packages, making this device an excellent choice for low-voltage and low-power applications for portable electronics and industrial systems.


Featuring a push-pull output stage, the RS8907 allows for operation with absolute minimum power consumption when driving any capacitive or resistive load.

The devices are ideal for system monitoring, include tablets, portable medical, smart phones. The RS8907 is specified at the full temperature range of -40°C to +125°C under single power supplies of 1.4V to 5.5V.

PIN CONFIGURATIONS



FUNCTION BLOCK DIAGRAM

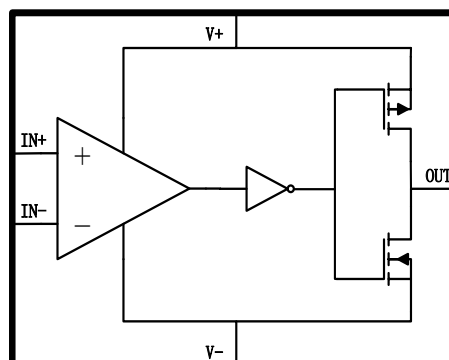

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

| | |
|---|----------------------|
| Supply Voltage, V+ to V-..... | 7.0V |
| Input Terminals, Voltage ⁽²⁾ | - 0.5 to (V+) + 0.5V |
| Current ⁽²⁾ | ±10mA |
| Storage Temperature | -65°C to +150°C |
| Operating Temperature | -40°C to +125°C |
| Junction Temperature..... | 150°C |
| Lead Temperature (Soldering, 10s) | 260°C |
| ESD Susceptibility | |
| HBM | 3000V |
| MM | 400V |

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less.


ESD SENSITIVITY CAUTION

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PACKAGE/ORDERING INFORMATION

| PRODUCT | ORDERING NUMBER | TEMPERATURE RANGE | PACKAGE LEAD | PACKAGE MARKING | PACKAGE OPTION |
|---------|-----------------|-------------------|-----------------|-----------------|--------------------|
| RS8907 | RS8907XF | -40°C~+125°C | SOT23-5 | 8907 | Tape and Reel,3000 |
| | RS8907XC5 | -40°C~+125°C | SOT353 (SC70-5) | 8907 | Tape and Reel,3000 |





ELECTRICAL CHARACTERISTICS

 (At $T_A = +25^\circ\text{C}$, $V_S = 1.4\text{V}$ to 5.5V , $V_{CM} = V_S/2$, $C_L = 15\text{pF}$, unless otherwise noted.)

| PARAMETER | | CONDITIONS | RS8907 | | | UNITS |
|--------------------------|------------------------------|--|---------------|---------|---------------|------------------------------|
| | | | MIN | TYP | MAX | |
| POWER SUPPLY | | | | | | |
| V_S | Operating Voltage Range | | 1.4 | | 5.5 | V |
| I_Q | Quiescent Current | | | 400 | 1500 | nA |
| PSRR | Power-Supply Rejection Ratio | $V_S = 1.4\text{V}$ to 5.5V , $V_{CM} = (V) + 0.5\text{V}$ | | 70 | | dB |
| INPUT | | | | | | |
| V_{OS} | Input Offset Voltage | $V_{CM} = V_S/2$ | | ± 1 | ± 3.5 | mV |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift | $V_{CM} = V_S/2$, $-40^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$ | | 2 | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | | | 1 | 10 | pA |
| V_{CM} | Common-Mode Voltage Range | $T_A = -40^\circ\text{C}$ to 125°C | $(V_-) - 0.1$ | | $(V_+) + 0.1$ | V |
| CMRR | Power-Supply Rejection Ratio | $V_S = 5.5\text{V}$, $V_{CM} = -0.1$ to 5.6V | | 70 | | dB |
| OUTPUT | | | | | | |
| V_{OH} | Output Swing From Upper Rail | $V_S = 1.4\text{V}$, $I_O = 0.1\text{mA}$ | | 70 | 75 | mV |
| | | $V_S = 5.0\text{V}$, $I_O = 2.5\text{mA}$ | | 140 | 170 | mV |
| V_{OL} | Output Swing From Lower Rail | $V_S = 1.4\text{V}$, $I_O = -0.1\text{mA}$ | | 35 | 40 | mV |
| | | $V_S = 5.0\text{V}$, $I_O = -2.5\text{mA}$ | | 85 | 115 | mV |
| I_{SC} | Short Circuit Sink Current | $V_S = 5.0\text{V}$ | | 42 | | mA |
| | Short Circuit Source Current | $V_S = 5.0\text{V}$ | | 38 | | mA |
| SWITCHING | | | | | | |
| T_{PHL} | Propagation Delay H To L | $V_S = 5.0\text{V}$, Overdrive = 10 mV | | 13 | | μs |
| | | $V_S = 5.0\text{V}$, Overdrive = 100 mV | | 9 | | |
| | | $V_S = 2.5\text{V}$, Overdrive = 10 mV | | 12 | | |
| | | $V_S = 2.5\text{V}$, Overdrive = 100 mV | | 8 | | |
| | | $V_S = 1.4\text{V}$, Overdrive = 10 mV | | 13 | | |
| | | $V_S = 1.4\text{V}$, Overdrive = 100 mV | | 9 | | |
| T_{PLH} | Propagation Delay L To H | $V_S = 5.0\text{V}$, Overdrive = 10 mV | | 30 | | |
| | | $V_S = 5.0\text{V}$, Overdrive = 100 mV | | 40 | | |
| | | $V_S = 2.5\text{V}$, Overdrive = 10 mV | | 22 | | |
| | | $V_S = 2.5\text{V}$, Overdrive = 100 mV | | 35 | | |
| | | $V_S = 1.4\text{V}$, Overdrive = 10 mV | | 22 | | |
| | | $V_S = 1.4\text{V}$, Overdrive = 100 mV | | 35 | | |
| T_R | Rise Time | Overdrive = 100 mV | | 240 | | ns |
| T_F | Fall Time | Overdrive = 100 mV | | 260 | | ns |





TYPICAL CHARACTERISTICS

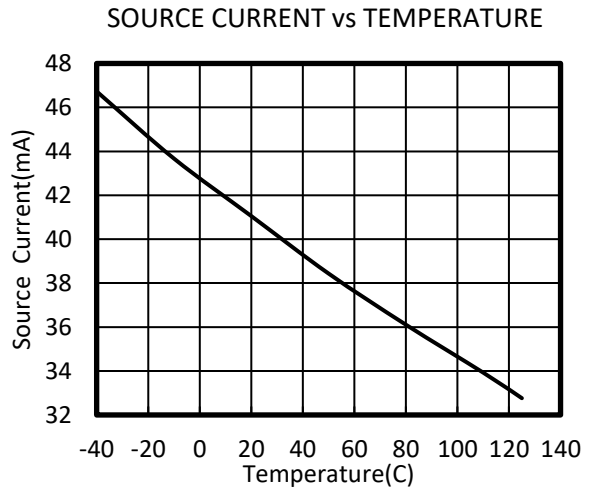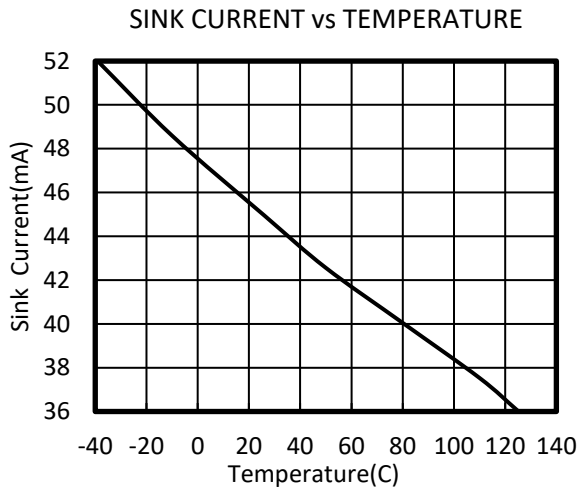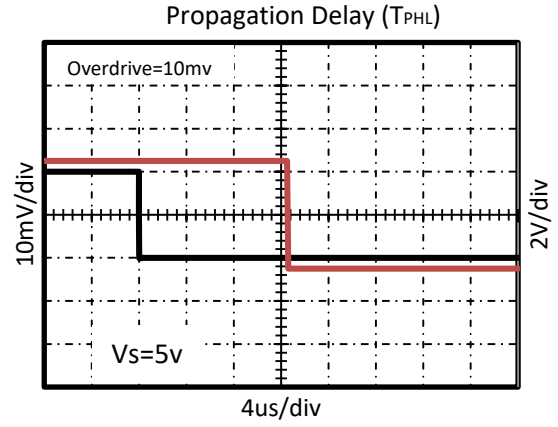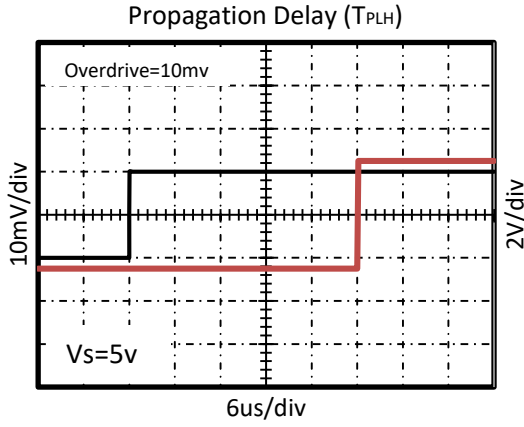At $T_A = +25^\circ\text{C}$, $V_S=5\text{V}$, $V_{CM} = V_S/2$, $C_L=15\text{pF}$ unless otherwise noted.







PACKAGE OUTLINE DIMENSIONS

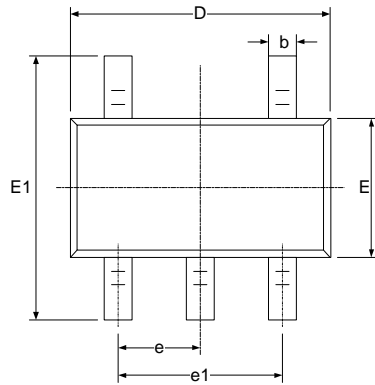SOT23-5


RECOMMENDED LAND PATTERN (Unit: mm)


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

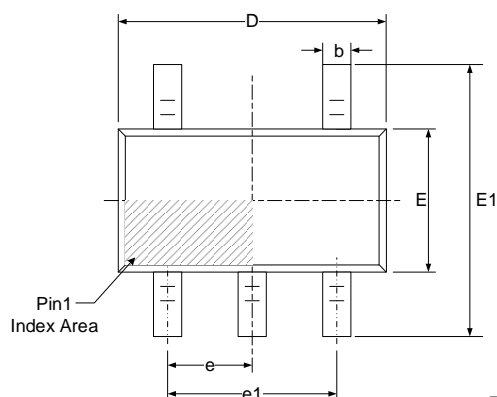SOT353(SC70-5)


RECOMMENDED LAND PATTERN (Unit: mm)


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 0.900 | 1.100 | 0.035 | 0.043 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.000 | 0.035 | 0.039 |
| b | 0.150 | 0.350 | 0.006 | 0.014 |
| c | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.000 | 2.200 | 0.079 | 0.087 |
| E | 1.150 | 1.350 | 0.045 | 0.053 |
| E1 | 2.150 | 2.450 | 0.085 | 0.096 |
| e | 0.650(BSC) | | 0.026(BSC) | |
| e1 | 1.300(BSC) | | 0.051(BSC) | |
| L | 0.260 | 0.460 | 0.010 | 0.018 |
| L1 | 0.525 | | 0.021 | |
| θ | 0° | 8° | 0° | 8° |