

REV.	ECON. NO.	APPD.	DATE
A0	RELEASE	Cheng	06/28/06
A1	修改单	niezhengqi	06/08/13

NOTES:

1. MATERIALS:

- 1-1. INSULATOR: Polyester UL94V-0.
- 1-2. CONTACT: BRASS SQ 0.5mm.
- 1-3. PLATED: CONTACT GOLD PLATED OVER Ni.

2. ELECTRICAL CHARACTERISTICS:

- 2-1. CURRENT RATING: 1.0 Amp.
- 2-2. VOLTAGE RATING: 250V AC/DC.
- 2-3. CONTACT RESISTANCE: 20 mohms MAX.
- 2-4. INSULATION RESISTANCE: 1000 MOhms MIN.
- 2-5. WITHSTANDING VOLTAGE: 500V AC/MINUTE.
- 2-6. Operation Temperature: -25° C~+105° C.


Part NO.

208- **1*-002* - ***


- NO. of Positions: 02-40
 - Contact length: Dim "A" X "B"
 - 1: 2.8x4.0
 - 2: 3.0x3.8
 - 4: 4.0x6.0
 - 7: 4.0x3.0
- Plated: Housing Material 4: PA6T
- Housing Color: 0: BLACK 9: WHITE
- 唛头: 0: 无 1: nexttron

See Table (1)

Code	Definition	Code	Definition
1	Gold Flash	4	Gold 10u"
2	Gold 3u"	5	Gold 15u"
3	Gold 5u"	6	Gold 30u"

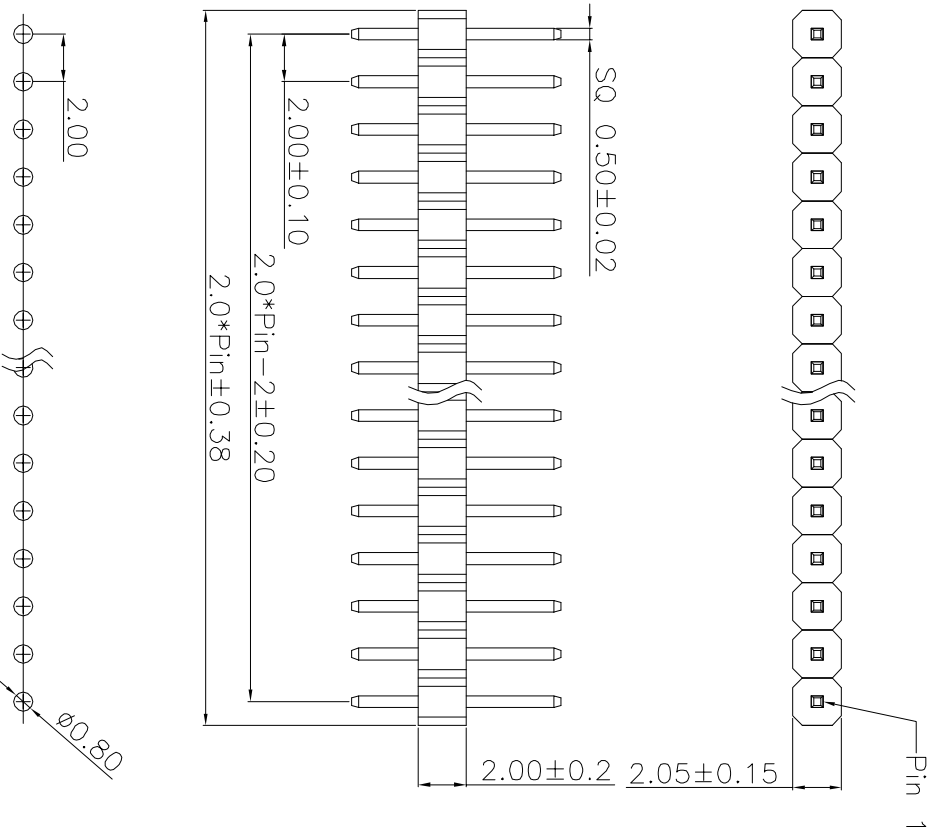

PCB LAYOUT

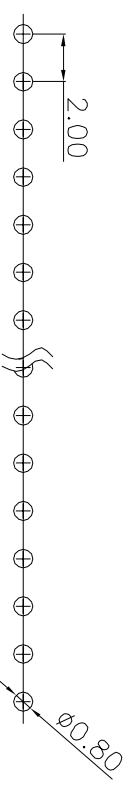

X ±0.5	UNITS	NAME:	深圳市君灏精密工业有限公司	
X ±0.30	mm	2.0 Pinheader Single Row Straight Type	SHENZHEN JUNHAO ENGINEERING CO., LTD	
.XX±0.20	MAT'L	PART NO.:	208- **1*-002* - ***	
.XXX±0.10	FINISH	APPD:	jeff	
X' ±2'		CHKD:	jeff	
<small>THESE DIMENSIONS AND SPECIFICATIONS ARE TO BE USED FOR THE MANUFACTURE OF THE PRODUCT. THE USER SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO THE PRODUCT OR TO THE USER'S EQUIPMENT CAUSED BY THE USE OF THIS PRODUCT. THE USER SHALL BE RESPONSIBLE FOR ANY DAMAGE TO THE PRODUCT OR TO THE USER'S EQUIPMENT CAUSED BY THE USE OF THIS PRODUCT.</small>			DR:	niezhengqi
			DATE:	08/08/13
			TITLE:	2.0 Pin Header Single Row
			DWG NO.:	EP-C-208-0010-0131
			SCALE:	1:1
			SHEET:	1/1
			REV.	A1