


PIN	A±0.20	B±0.25	C±0.20	D±0.25
6	5.08	16.76	22.86	26.92
8	7.62	19.30	25.40	29.46
10	10.16	21.84	27.94	32.00
14	15.24	26.92	33.02	37.08
16	17.78	29.46	35.56	39.62
18	20.32	32.00	38.10	42.16
20	22.86	34.54	40.64	44.70
24	27.94	39.62	45.72	49.78
26	30.48	42.16	48.26	52.32
30	35.56	47.24	53.34	57.40
34	40.64	52.32	58.42	62.48
40	48.26	59.94	66.04	70.10
50	60.96	72.64	78.74	82.80
60	73.66	85.35	91.44	95.50
64	78.74	90.42	96.52	100.58

- NOTES:
- MATERIALS:
 - INSULATOR: PBT+30%GF UL94V-0, BLACK.
 - CONTACT: Copper ALLOY.
 - PLATED: CONTACT GOLD PLATED OVER Ni.
 - ELECTRICAL CHARACTERISTICS:
 - CURRENT TATING: 3 Amp.
 - CONTACT RESISTANCE: 20 mOhms MAX.
 - WITHSTANDING VOLTAGE: 500V AC 1MINUTE.
 - INSULATION RESISTANCE: 1000 MOhms MIN.
 - Operation Temperature: -40° C~+105° C.

Part NO.

230-0*1-**-20*

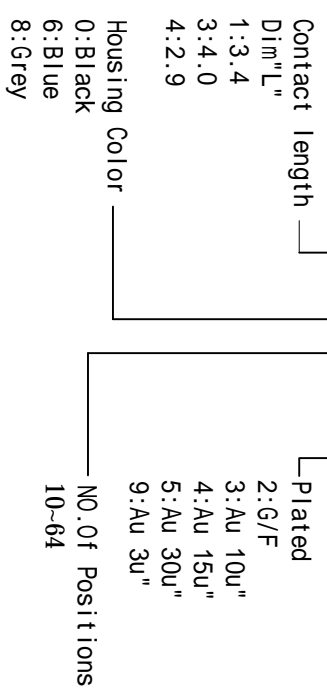

X ±0.5	UNITS	NAME:	2.54mm EJECTOR HEADER CONNECTOR
X ±0.38	MAT'L	PART NO.:	SEE TABLE
XX±0.25	FINISH	APPD:	jeff
XX±0.08		CHKD:	jeff
X' ±2'		DR:	cheng
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN JINHAO ENGINEERING CO.,LTD. AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF SHENZHEN JINHAO ENGINEERING CO.,LTD.		DATE: 06/23/11 DATE: 06/23/11 DATE: 06/23/11	
深圳市君瀚精密工业有限公司 SHENZHEN JINHAO ENGINEERING CO.,LTD		TITLE: 2.54mm EJECTOR HEADER RIGHT ANGLE Long Ejector DWG NO.: EP-C-230-0012-0019	
SCALE	SHEET	REV.	
1:1	1/1	AO	

REV.	ECON. NO.	APPD.	DATE
AO	RELEASE	cheng	06/28/05
A1	版数修正 上海君瀚工程	cheng	06/23/11