

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIERS


REVERSE VOLTAGE - 50 to 1000 Volts
FORWARD CURRENT - 2.0 Ampere

FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead tin plated copper

MECHANICAL DATA

- Polarity: Symbol molded on body
- Mounting position :Any

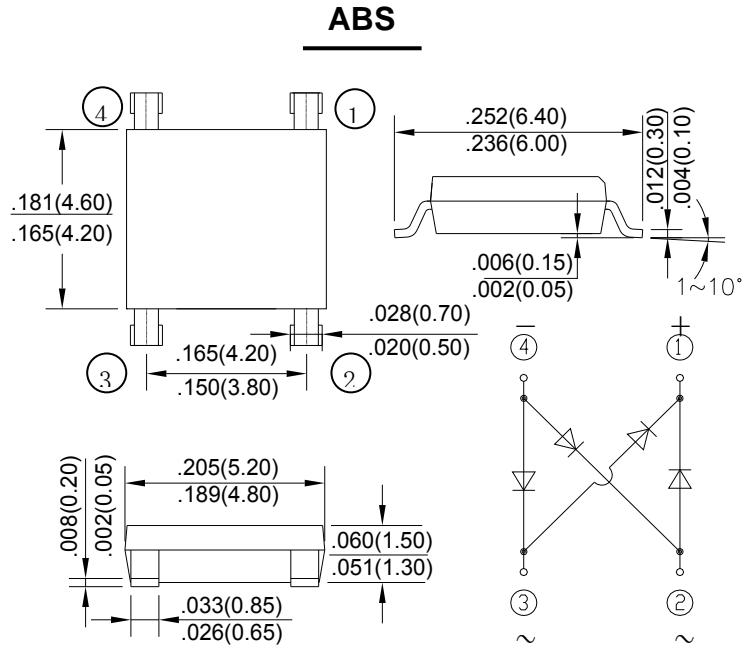

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	ABS205	ABS21	ABS22	ABS24	ABS26	ABS28	ABS210	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current (Note 1) @TA=40 °C	I(AV)	2.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	IFSM	60							A
Peak Forward Voltage at 2.0A DC	VF	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage @TJ=25°C @TJ=125°C	IR	5.0 500							μA
Typical Thermal Resistance (Note2)	RθJA	80							°C/W
Operating Temperature Range	TJ	-55 to +150							°C
Storage Temperature Range	TSTG	-55 to +150							°C

- NOTES: 1. Mounted on P.C. board.
2. Thermal resistance junction to ambient.
3. The typical data above is for reference only

FIG.1-FORWARD CURRENT DERATING CURVE

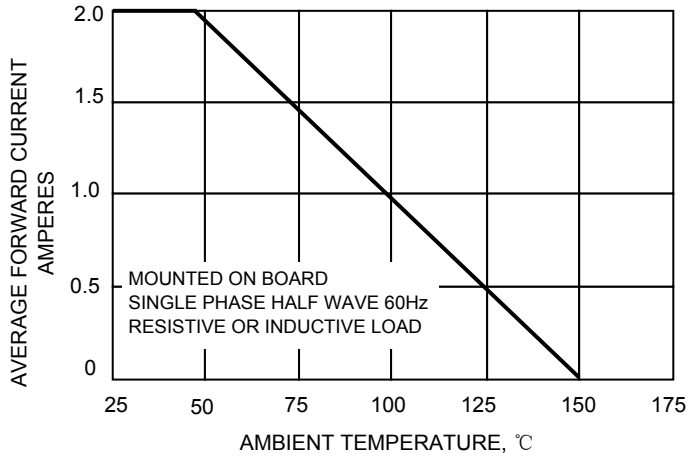


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

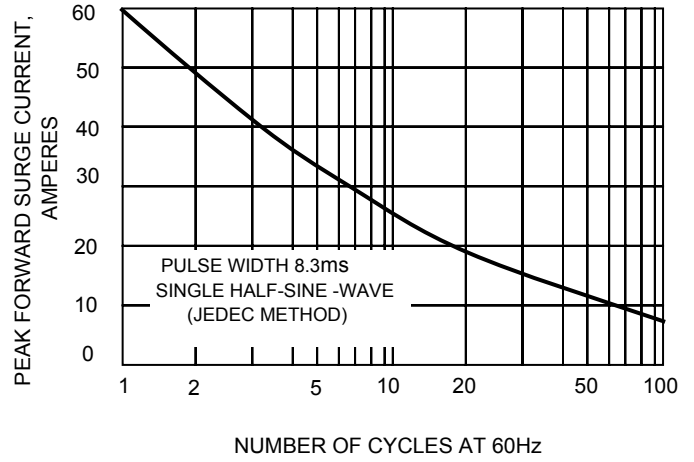


FIG.3-TYPICAL REVERSE CHARACTERISTICS


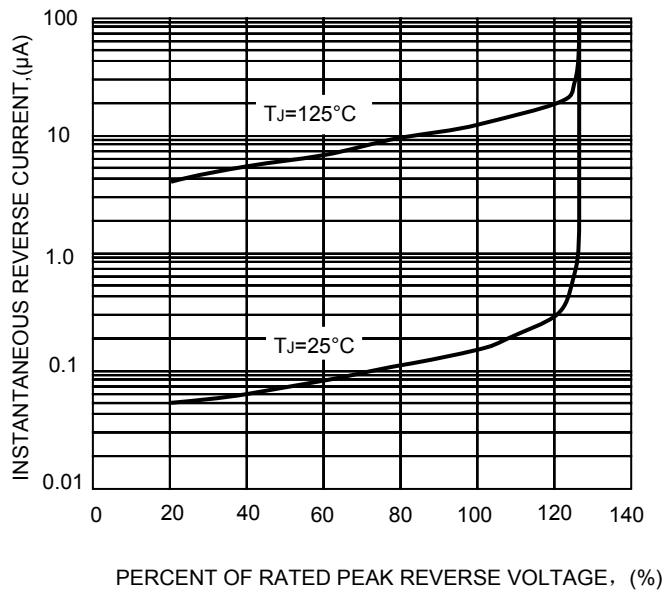


FIG.4-TYPICAL FORWARD CHARACTERISTICS

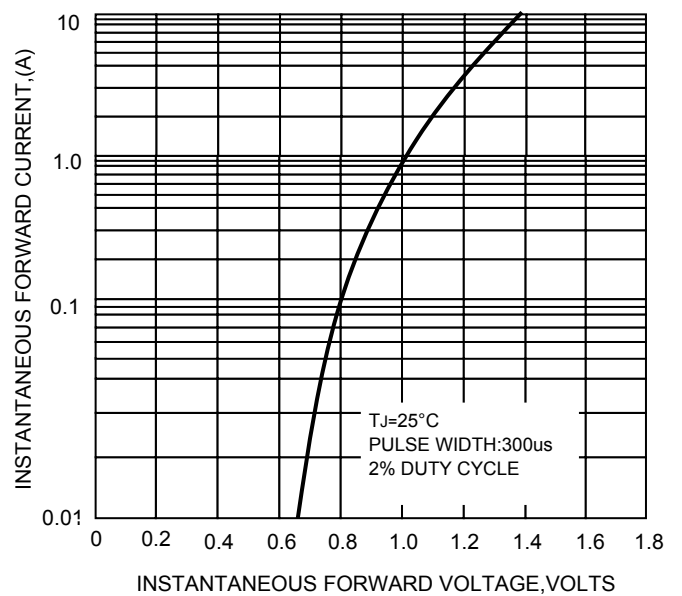

The curve graph is for reference only, can't be the basis for judgment